



Online Information

www.heule.com/en/chamfering-tool/snap







SNAP

Table of Contents

Characteristics and Advantages	93
Applications and Typical Workpieces	95
Tool Description	96
Function Principle / Process Steps Description	97
Product Selection	
Range Summary	98
Tool Part Numbers SNAP	99
SNAP2 Tool Ø 2.0 mm to 2.9 mm	100
SNAP3 Tool Ø 3.0 mm to 3.9 mm	102
SNAP4 Tool Ø 4.0 mm to 5.0 mm	104
SNAP5 Tool Ø 5.0 mm to 10.0 mm	106
SNAP8 Tool Ø 8.0 mm to 12.0 mm	108
SNAP12 Tool Ø 12.0 mm to 20.0 mm	110
SNAP20 Tool Ø 20.0 mm to 35.0 mm	112
SNAP Thread Tool M2.5 / M3 / M4 / M5	114
SNAP Thread Tool M6 / M8 / M10 / M12 / M14	116
SNAP Cassette Systems SNAP5 / SNAP20	118
Installation Dimensions SNAP Cassette	120
Comparison GS / DF Blade Geometries	122
Technical Information	
Cutting Data SNAP	126
Programming Information SNAP	127
Adjusting the Chamfer Size / Setting the Blade Force	128
Blade Change SNAP2 / SNAP3 / SNAP4	129
Blade Change SNAP5 / SNAP8 / SNAP12 / SNAP20	130
Spare Parts	131
Blade Dimensions	134
FAQ	137

SNAP

Economic front and back chamfering in one operation,
with most easy blade change.

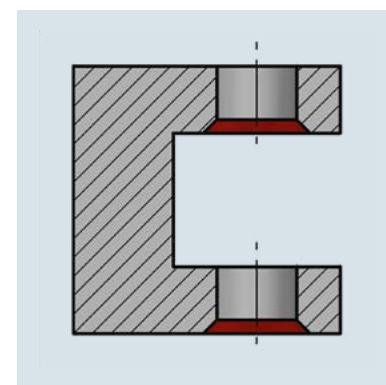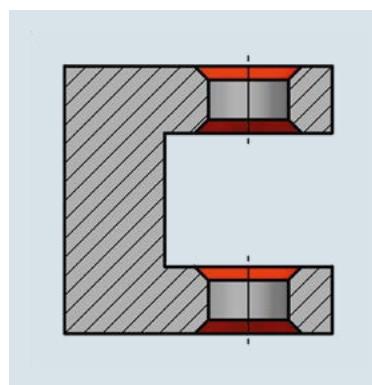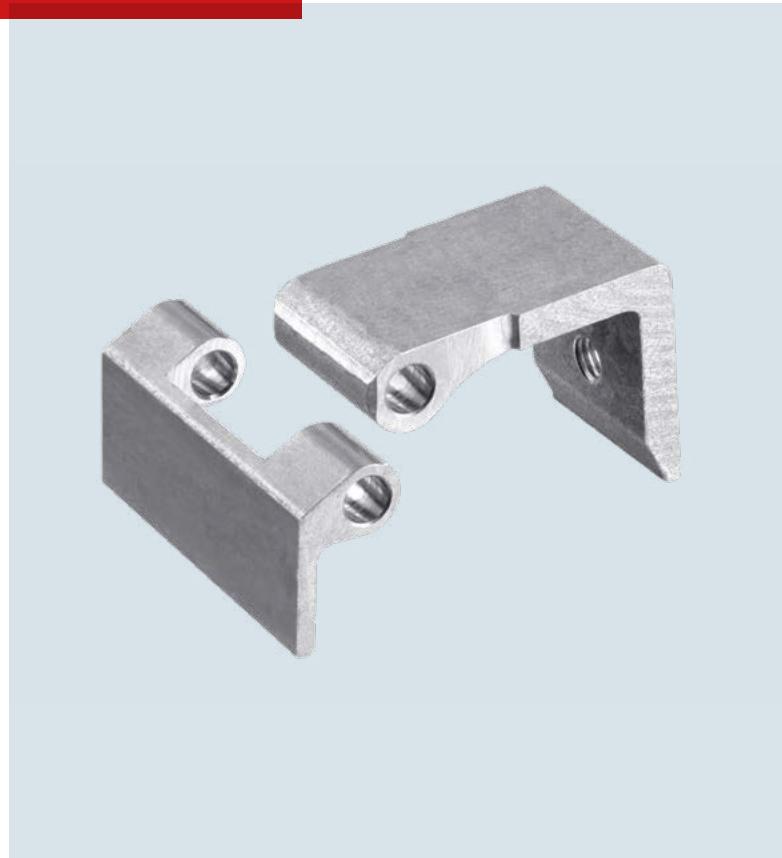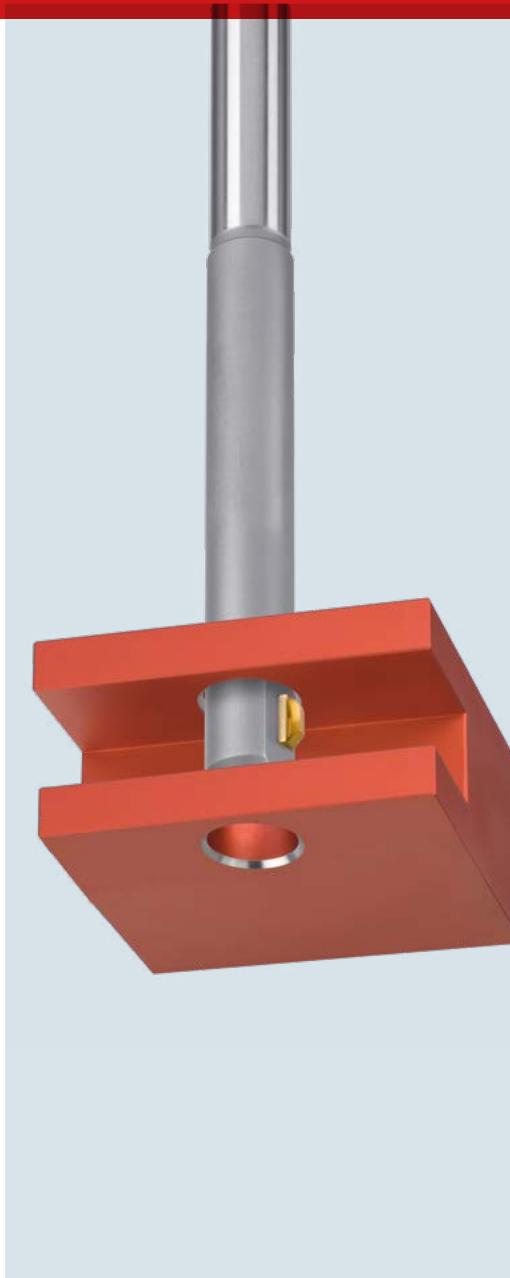



SNAP – The Economic Chamfering Tool





Economic front and back chamfering of bores in ONE OPERATION, with very easy blade change.

The SNAP tool is an efficient front and back chamfering and deburring tool that is easy to use and which allows quick blade changes, making it a convenient solution for any manufacturing environment. Without any need to turn the workpiece or to stop the spindle, the tool removes the burrs and chamfers the edges.

The SNAP tool has been designed for automatic operation involving large production lots. The tool is characterised by its most simple blade change that is carried out manually and without any specific aids.

Characteristics and Advantages

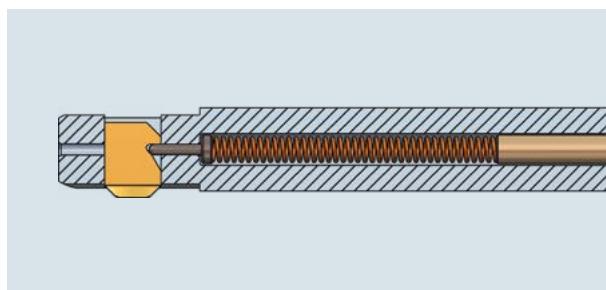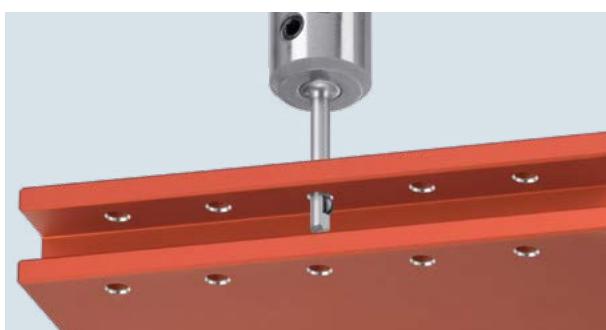

- The SNAP standard tool series ranges from bore diameter 2.0 mm to 35.0 mm. The cassette system is designed for bore diameters larger than 35.0 mm.


- As manufacturer of this tool system, HEULE is able to provide also tailor-made solutions for customer-specific applications.

- SNAP produces chamfers and counterbores ranging from 0.2 - 1.5 mm depending on bore diameter and blade.


- Different blades can be used in one tool in order to achieve different chamfer sizes. The geometry of the blade defines the chamfer size.

- The combination of the mechanical spring-load controlled function principle with the robust design are responsible for the outspoken reliability.


- The application of the tool is very user-friendly. It is ready to use quickly without any preadjustments.

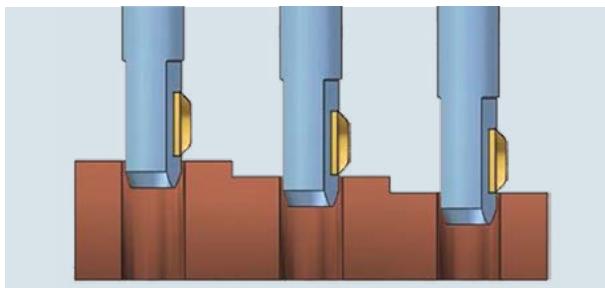


- The blade starts to cut only when it is in touch with the workpiece. This ensures a consistent chamfer capacity no matter where the machining level is. SNAP compensates possible height irregularities of the workpieces to be machined automatically, i.e. such as cast parts.

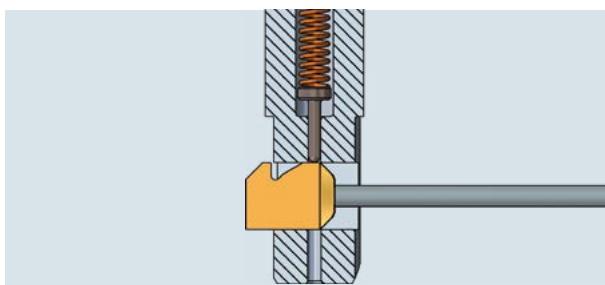


- The easy to exchange carbide blades are carried out with material dependent coatings. Any blunt object or a plastic bolt may serve for pushing out the blade.

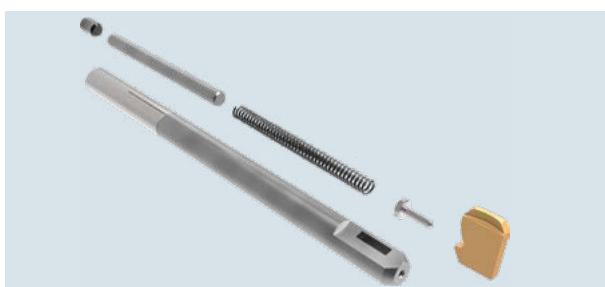

- The simple and compact design combined with its fully mechanical function principle guarantee its reliable operation.

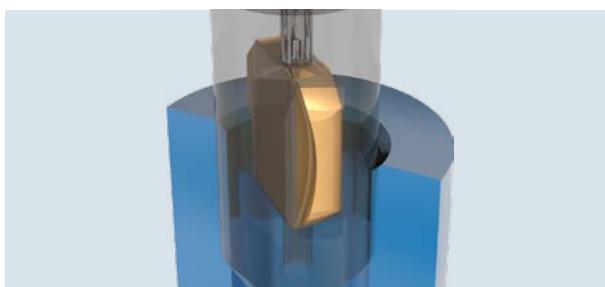

- The penetration of the bore does not injure the bore surface. Thanks to its especially developed sliding section, the blade slides softly with minimal friction over the bore surface.

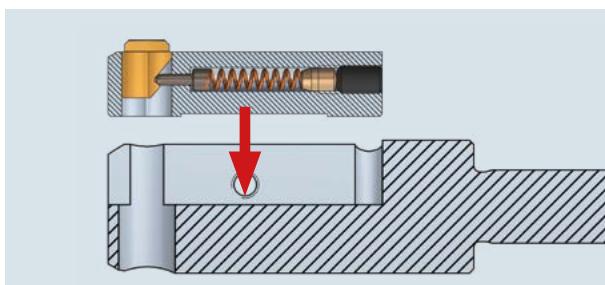

- The cassette solution (simple tool holder with cassette tool) expands the maximum diameter of still machinable bore edges without limits.
- The cassette solution allows to integrate the chamfering process into an existing customer tool. By combining two or several processes in one single tool, the cycle time of the production process can be reduced considerably.

Applications and Typical Workpieces

The SNAP tooling system's simple design makes it suitable ideally for all production processes where high process stability is required. No complicated or time consuming setting is necessary to make the tool ready for operation. The drilled hole diameter determines the size of tool required and the desired

chamfer size determines the blade. For instance, if a larger chamfer size is needed, you simply exchange the existing blade by the next larger blade. For instance, with a given bore- \varnothing of 4.4 mm the chamfer sizes- \varnothing 4.8, 5.2 and 5.6 are producable with different blades (see page 104).



Tool Description

The SNAP range is HEULE's answer to the increasing demand for simpler and more flexible manufacturing solutions.

Designwise, the SNAP tool family consists of 3 types. There is SNAP2, 3 and 4 on one hand, SNAP5 to 20 on the other hand. The third group are the cassette tools.

The design concepts differ because of their sizes. Whereas the tool body of SNAP5 up to SNAP20 is a one-piece construction, it is split up into tool body and blade housing for SNAP2 upto SNAP4. The cassette tools use the identical function principle but are built in a more compact design.



Image: SNAP5 - The so called "B" form of the blade is more complex with regard to production. However, its improved guiding capacities justify this design for this tool size.

The SNAP technology offers a very user-friendly and competitive front and back chamfering system. For instance, the blade can be exchanged easily manually without any need for additional tools. The complete SNAP tool consists of six components only.

The workpiece is machined with a rotating spindle similar to a drill. In one single pass and without changing the direction of the spindle rotation, it is possible to chamfer the front as well as the back of the bore neatly. Once the predefined chamfer size has been reached, the blade moves automatically into the tool body. So, it passes in rapid traverse through the bore. The ball shape of the blade protects the bore surface from being damaged at the contact point.



Image: SNAP2 - The design of the tool body consists of two components for dimension reasons: a tool body and a blade housing.


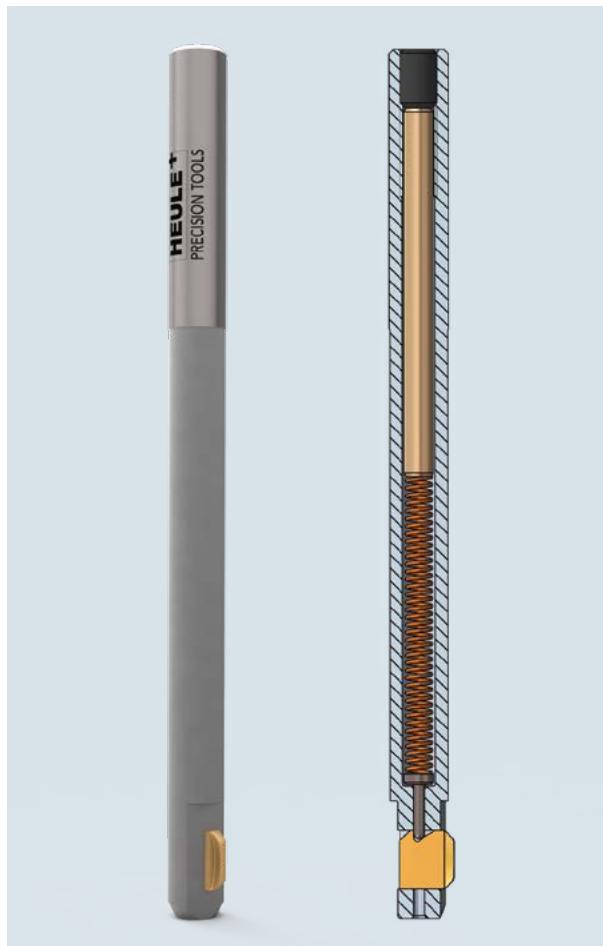


Image: SNAP8 - Unlike the smaller tool types SNAP2 up to 4 this tool has one tool body and 5 other components only.


Function Principle

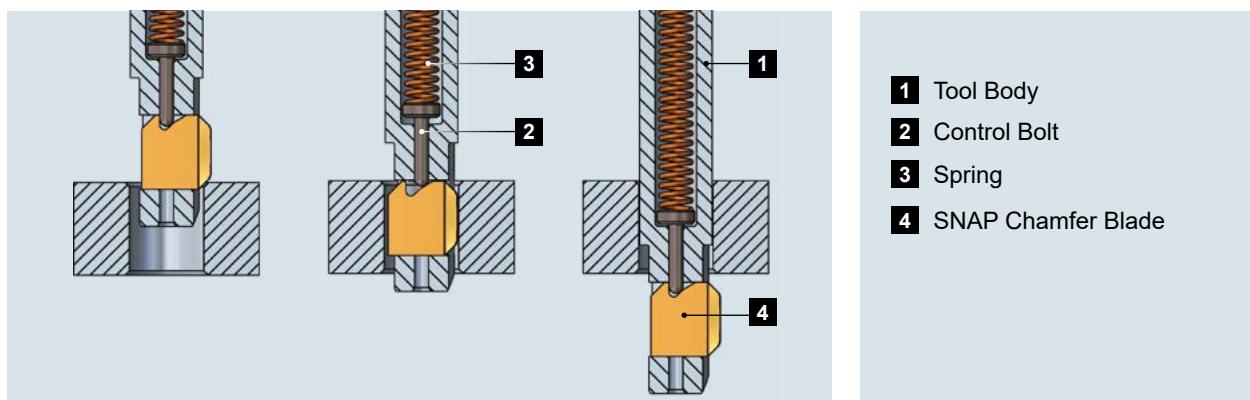

The SNAP deburring blade is kept movable in the tool body via a control bolt held under spring pressure. A specially ground forward and backward or backward cutting only blade produces the required chamfer whilst the tool enters the bore. Once the chamfer size is attained, the deburring blade continuously retracts into the tool body. On a specially designed gliding radii, the blade passes through the hole without damaging it. The deburring

blade has a special recess which the control bolt engages in and after exiting the hole brings the blade back into its starting position. A smooth deburring or chamfering operation forwards and backwards is the result of this machining operation. Chamfer size and chamfer angle are predetermined geometrically at the blade and can only be changed by the use of another blade of an adapted design.

Process Steps Description

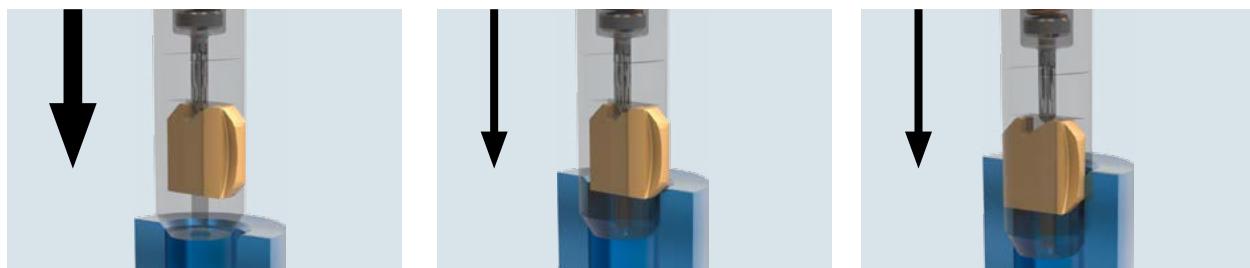


The process is very simple. First, rapid traverse of the cutting unit of the tool above the top material surface of hole or burr. Referencing the front edge of the cutting blade.

In working feed and working speed, the deburring/chamfering of the upper bore edge is carried out.


Once the chamfer size is attained, traverse in rapid feed through the hole without stopping the spindle.



Despite the swivel movement of the spindle, the blade passes through the hole without damaging it. Even reamed bores can be passed through without any damage.

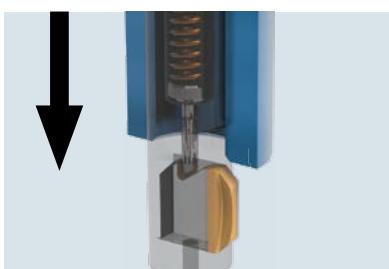

Once clear of the back side of the bore, rapid feed is stopped and the SNAP blade returns to its starting position.

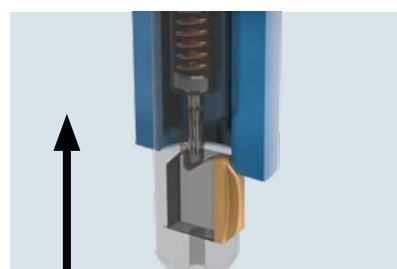

Without stopping the spindle or change of direction of the spindle, linear feed backward then allows the machining of a suitable back chamfer. Once finished, traverse in rapid speed and without stopping the spindle out of the hole.

SNAP Range Summary

The tool range comprises of tools for the use in bore diameters ranging from 2.0 mm to 35.0 mm. In addition, using cassettes, any size of bore diameter can be chamfered. The chamfering capacity (radi-


ally) is 0.1 mm up to 1.5 mm depending on blade selection. Within one tool type series, there are variants of diameters that cover the range up to next larger tool type series.




Bore	Max. Chamfering Capacity ¹	Tool Type Series
Ø2.0 – Ø2.9 mm	0.20 - 0.30 mm	SNAP2
Ø3.0 – Ø3.9 mm	0.30 - 0.50 mm	SNAP3
Ø4.0 – Ø5.0 mm	0.60 - 0.75 mm	SNAP4
Ø5.0 – Ø8.0 mm	1.00 mm	SNAP5
Ø8.0 – Ø12.0 mm	0.75 mm	SNAP8
Ø12.0 – Ø20.0 mm	1.00 mm	SNAP12
Ø20.0 - Ø35.0 mm	1.50 mm	SNAP20
from Ø12.6 mm	1.50 mm	SNAP5 Cassette
from Ø25.0 mm	1.50 mm	SNAP20 Cassette
from Ø35.0 mm	1.50 mm	SNAP20 Cassette
Thread M2.5 Ø2.05 mm	0.35 mm	SNAP2/M2.5
Thread M3 Ø2.5 mm	0.45 mm	SNAP2/M3
Thread M4 Ø3.3 mm	0.60 mm	SNAP3/M4
Thread M5 Ø4.2 mm	0.70 mm	SNAP4/M5
Thread M6 Ø5.0 mm	0.75 mm	SNAP5/M6
Thread M8 Ø6.8 mm	0.85 mm	SNAP5/M8
Thread M10 Ø8.5 mm	1.00 mm	SNAP5/M10
Thread M12 Ø10.2 mm	1.15 mm	SNAP5/M12
Thread M14 Ø12.0 mm	1.25 mm	SNAP5/M14

¹⁾ The achievable chamfer capacity varies slightly depending on material, blade force, cutting data or application. The indicated dimension is the theoretically possible maximum.

Part No.:
Tool without blade

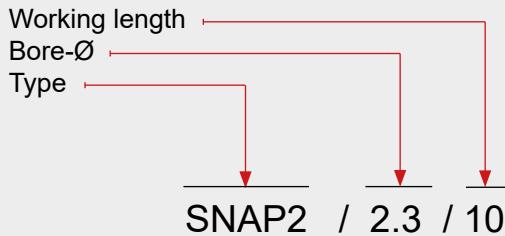

Part No.:
Blade

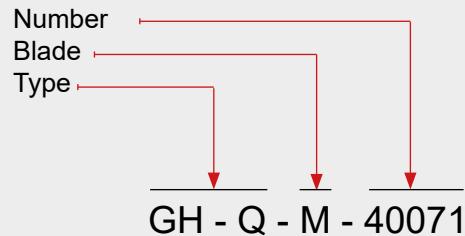**Tool type**

Within a tool type there are different tool sizes available. The diameter of the tool housing and the working length vary according to the application.

Tool size

The tool size is determined by the bore diameter. Tool diameter and possible chamfering resp. deburring capacity are shown in the tables (page 70ff).

Working length

For the tool types SNAP2, SNAP3 and SNAP4 there are different working lengths available. The tool types SNAP5 and larger possess only one working length per type. This is why it is not necessary to mention it on the order.

Clamping system

As standard, all tools will be manufactured with a cylindrical shank. Upon request, Weldon, Whistle Notch clamping systems can be ordered for the tool types SNAP5 up to SNAP20 as special versions but these are not available from stock.

If another than the standard shank is requested, please add the following suffixes:

-HB = Weldon
-HE = Whistle Notch

Order Example:
SNAP8/9.5-HB

Type

All SNAP blades have the designation GH-Q-M and a consecutive number. These numbers are not based on a system and are therefore without any further information.

Number

Different blades for different chamfer diameters are possible for every tool size (bore-Ø). Hence, the desired chamfer diameter determines the selection of the blade.

Coatings

All blades are made of carbide. The available coatings are:

T = steel, titan, Inconel (standard)
D = for aluminium only
A = increased requirements

An exception form the small tools SNAP2, SNAP3, SNAP4 and SNAP5. Due to the increased requirements the coating A has been defined as standard coating.


Order Example SNAP2, SNAP3, SNAP4

<i>Requirements:</i>	Deburr bore, Chamfer min. 0.1 mm, Workpiece thickness 18.0 mm
Bore-Ø:	2.6 mm
Material:	Cast
Deburr diameter:	max. 2.8 mm
<i>Selection:</i>	
Tool:	Part No. SNAP2/2.6/20
Blade:	Part No. GH-Q-M-40071

Order Example SNAP5 up to SNAP20

<i>Requirements:</i>	Back bore machining Chamfer min. 0.5 mm x 45°
Bore-Ø:	11.3 mm
Defined chamfer-Ø:	12.5 mm
Material:	Aluminium
<i>Selection:</i>	
Tool:	Part No. SNAP8/11.0
Blade:	Part No. GH-Q-M-05728

SNAP2 Tool Ø 2.0 mm to 2.9 mm

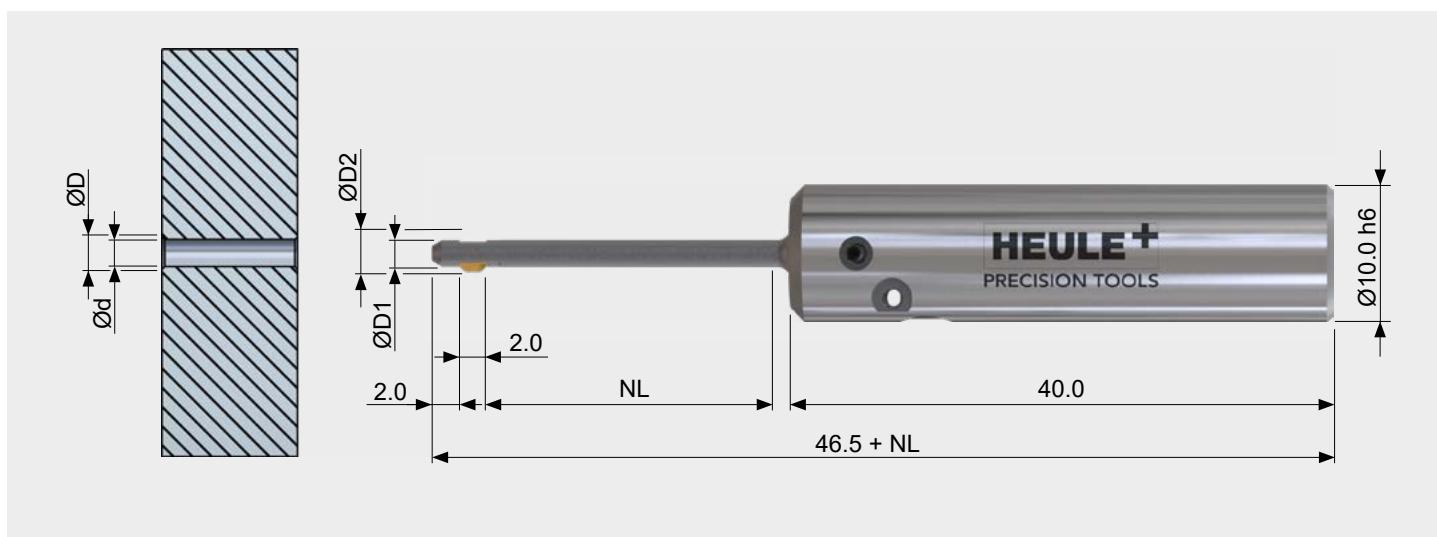

Tool Table


Tool without Blade					
Bore-Ø d	Chamfer-Ø max ¹ D	Tool-Ø D1	Maximum-Ø ² D2	Part No. NL = 10.0 mm	Part No NL = 20.0 mm
2.0	2.4	1.95	$\varnothing D + 0.2$	SNAP2/2.0/10	SNAP2/2.0/20
2.1	2.4 / 2.6	2.05		SNAP2/2.1/10	SNAP2/2.1/20
2.2	2.4 / 2.6 / 2.8	2.15		SNAP2/2.2/10	SNAP2/2.2/20
2.3	2.6 / 2.8	2.25		SNAP2/2.3/10	SNAP2/2.3/20
2.4	2.6 / 2.8 / 3.0	2.35		SNAP2/2.4/10	SNAP2/2.4/20
2.5	2.8 / 3.0	2.45		SNAP2/2.5/10	SNAP2/2.5/20
2.6	2.8 / 3.0 / 3.2	2.55		SNAP2/2.6/10	SNAP2/2.6/20
2.7	3.0 / 3.2	2.65		SNAP2/2.7/10	SNAP2/2.7/20
2.8	3.0 / 3.2 / 3.4	2.75		SNAP2/2.8/10	SNAP2/2.8/20
2.9	3.2 / 3.4	2.85		SNAP2/2.9/10	SNAP2/2.9/20

¹⁾ Different chamfer-Ø can be achieved per tool size by using different blades. One blade however produces one defined chamfer-Ø only. The achievable chamfer capacity varies slightly depending on material, blade force, cutting data or application. The indicated dimension is the theoretically possible maximum.

²⁾ The maximum diameter D2 varies depending on the selected blade. Please calculate value with formula. **Please mind any interfering edges.**

ORDERING INFORMATION

- The tool types SNAP2, SNAP3 and SNAP4 are available with cylindrical shank only.
- Attention: The tools are **without blade**. The blades for the tool need to be ordered separately. Please refer to page 101 for GS geometry.

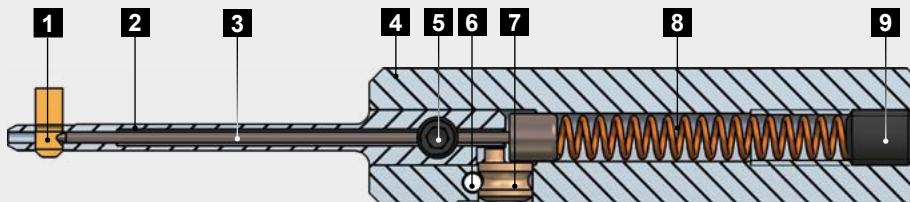

Spare Parts

Pos.	Description	Part No.
1	Blade	see below
2	Blade housing	see page 131
3	Control bolt	GH-Q-E-0236 (NL: 10.0 mm) GH-Q-E-0237 (NL: 20.0 mm)
4	Tool body SNAP2-4 Ø10.0 h6	GH-Q-G-5024
	Tool body assembly SNAP2-4 Ø10.0 h6 incl. Excenter GH-S-E-0031 incl. Roll pin GH-C-E-0811	GH-Q-G-5025
5	Locking screw M3x3.3	GH-H-S-1075
6	Roll pin SNAP2-4	GH-C-E-0811
7	Excenter SNAP2-4	GH-S-E-0031
8	Spring Ø3.2xØ0.45x23.0	GH-H-F-0047
9	Set screw M4x5.0 DIN913 Wrench SW1.5 to Pos. 9	GH-H-S-0134 GH-H-S-2101

Blades GS Geometry 90°

	Part No. forward and backward cutting		backward cutting only	
	Coating A	Coating D	Coating A	Coating D
Chamfer-Ø ¹	Coating A	Coating D	Coating A	Coating D
2.4	GH-Q-M-40031*	GH-Q-M-40032	GH-Q-M-40631	GH-Q-M-40632
2.6	GH-Q-M-40051*	GH-Q-M-40052	GH-Q-M-40651	GH-Q-M-40652
2.8	GH-Q-M-40071*	GH-Q-M-40072	GH-Q-M-40671	GH-Q-M-40672
3.0	GH-Q-M-40091*	GH-Q-M-40092	GH-Q-M-40691	GH-Q-M-40692
3.2	GH-Q-M-40111*	GH-Q-M-40112	GH-Q-M-40711	GH-Q-M-40712
3.4	GH-Q-M-40131*	GH-Q-M-40132	GH-Q-M-40731	GH-Q-M-40732

^{*} Standard items / Please enquire about stock or delivery times for all non-standard items.


¹⁾ The indicated dimension is the theoretically possible maximum.

Explanations to coatings (please refer to page 99)

A: Coating for steel, titanium, Inconel

D: Coating for aluminium alloys only

SNAP3 Tool Ø 3.0 mm to 3.9 mm

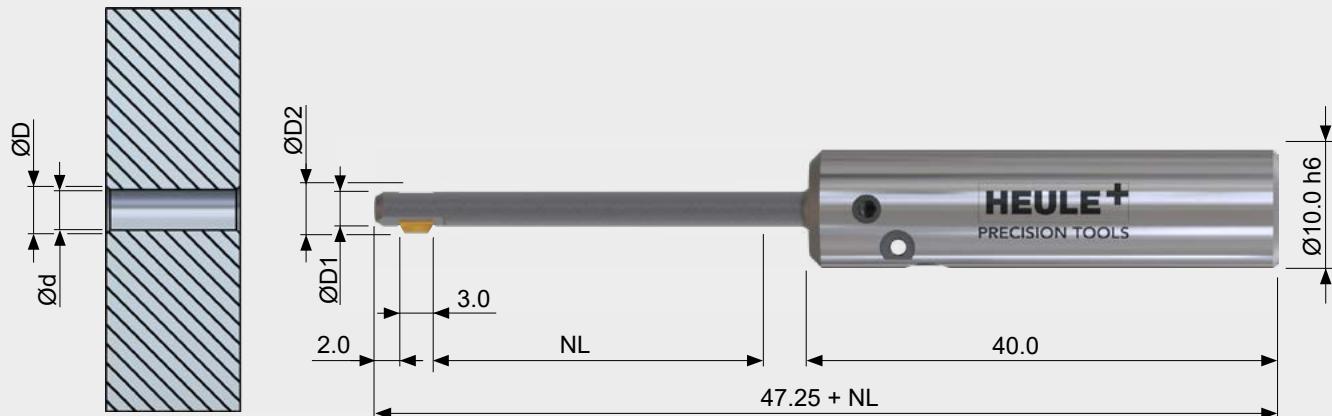

Tool Table


Tool without Blade						
Bore-Ø d	Chamf.-Ø max ¹	Tool-Ø D1	Max.-Ø ² D2	Part No. NL = 10.0 mm	Part No. NL = 20.0 mm	Part No. NL = 30.0 mm
3.0	3.3 / 3.6	2.9	$\text{ØD} + 0.3$	SNAP3/3.0/10	SNAP3/3.0/20	SNAP3/3.0/30
3.1	3.6 / 3.9	3.0		SNAP3/3.1/10	SNAP3/3.1/20	SNAP3/3.1/30
3.2	3.6 / 3.9 / 4.2	3.1		SNAP3/3.2/10	SNAP3/3.2/20	SNAP3/3.2/30
3.3	3.9 / 4.2	3.2		SNAP3/3.3/10	SNAP3/3.3/20	SNAP3/3.3/30
3.4	3.9 / 4.2	3.3		SNAP3/3.4/10	SNAP3/3.4/20	SNAP3/3.4/30
3.5	3.9 / 4.2 / 4.5	3.4		SNAP3/3.5/10	SNAP3/3.5/20	SNAP3/3.5/30
3.6	4.2 / 4.5	3.5		SNAP3/3.6/10	SNAP3/3.6/20	SNAP3/3.6/30
3.7	4.2 / 4.5	3.6		SNAP3/3.7/10	SNAP3/3.7/20	SNAP3/3.7/30
3.8	4.2 / 4.5 / 4.8	3.7		SNAP3/3.8/10	SNAP3/3.8/20	SNAP3/3.8/30
3.9	4.5 / 4.8	3.8		SNAP3/3.9/10	SNAP3/3.9/20	SNAP3/3.9/30

¹⁾ Different chamfer-Ø can be achieved per tool size by using different blades. One blade however produces one defined chamfer-Ø only. The achievable chamfer capacity varies slightly depending on material, blade force, cutting data or application. The indicated dimension is the theoretically possible maximum.

²⁾ The maximum diameter D2 varies depending on the selected blade. Please calculate value with formula. **Please mind any interfering edges.**

ORDERING INFORMATION

- The tool types SNAP2, SNAP3 and SNAP4 are available with cylindrical shank only.
- Attention: The tools are **without blade**. The blades for the tool need to be ordered separately. Please refer to page 103 for GS geometry.

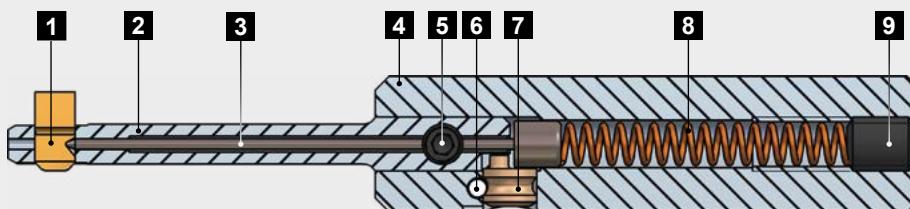

Spare Parts

Pos.	Description	Part No.
1	Blade	see below
2	Blade housing	see page 131
3	Control bolt	GH-Q-E-0236 (NL: 10.0 mm) GH-Q-E-0237 (NL: 20.0 mm) GH-Q-E-0238 (NL: 30.0 mm)
4	Tool body SNAP2-4 Ø10.0 h6 Tool body assembly SNAP2-4 Ø10.0 h6 incl. Excenter GH-S-E-0031 incl. Roll pin GH-C-E-0811	GH-Q-G-5024 GH-Q-G-5025
5	Locking screw M3x3.3	GH-H-S-1075
6	Roll pin SNAP2-4	GH-C-E-0811
7	Excenter SNAP2-4	GH-S-E-0031
8	Spring Ø3.2xØ0.45x23.0	GH-H-F-0047
9	Set screw M4x5.0 DIN913 Wrench SW1.5 zu Pos. 9	GH-H-S-0134 GH-H-S-2101

Blades GS Geometry 90°

Chamfer-Ø ¹	Part No. forward and backward cutting		backward cutting only	
	Coating A	Coating D	Coating A	Coating D
3.3	GH-Q-M-40171*	GH-Q-M-40172	GH-Q-M-40771	GH-Q-M-40772
3.6	GH-Q-M-40201*	GH-Q-M-40202	GH-Q-M-40801	GH-Q-M-40802
3.9	GH-Q-M-40231*	GH-Q-M-40232	GH-Q-M-40831	GH-Q-M-40832
4.2	GH-Q-M-40261*	GH-Q-M-40262	GH-Q-M-40861	GH-Q-M-40862
4.5	GH-Q-M-40291*	GH-Q-M-40292	GH-Q-M-40891	GH-Q-M-40892
4.8	GH-Q-M-40321*	GH-Q-M-40322	GH-Q-M-40921	GH-Q-M-40922

^{*) Standard items / Please enquire about stock or delivery times for all non-standard items.}

¹⁾ The indicated dimension is the theoretically possible maximum.


Explanations to coatings (please refer to page 99)

A: Coating for steel, titanium, Inconel

D: Coating for aluminium alloys only

Product Selection

SNAP4 Tool Ø 4.0 mm to 5.0 mm

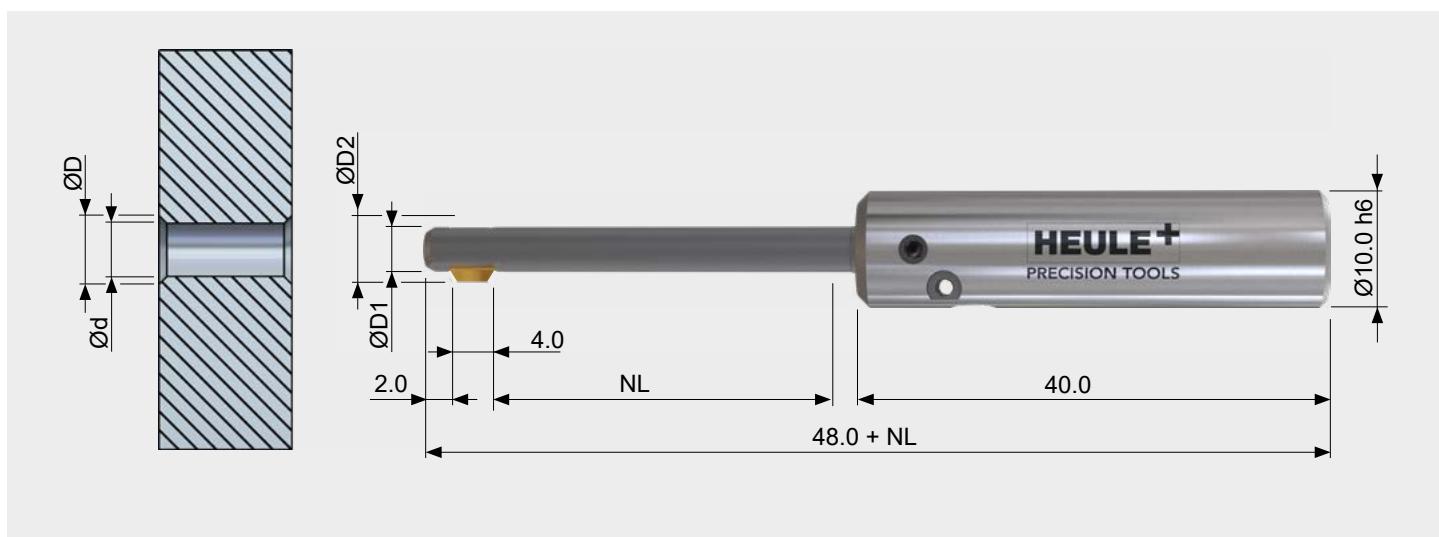

Tool Table


Tool without Blade						
Bore-Ø d	Chamf.-Ø max ¹	Tool-Ø D1	Max.-Ø ² D2	Part No. NL = 10.0 mm	Part No. NL = 20.0 mm	Part No. NL = 30.0 mm
4.0	4.4 / 4.8 / 5.2	3.9	ØD + 0.4	SNAP4/4.0/10	SNAP4/4.0/20	SNAP4/4.0/30
4.1	4.8 / 5.2 / 5.6	4.0		SNAP4/4.1/10	SNAP4/4.1/20	SNAP4/4.1/30
4.2	4.8 / 5.2 / 5.6	4.1		SNAP4/4.2/10	SNAP4/4.2/20	SNAP4/4.2/30
4.3	4.8 / 5.2 / 5.6	4.2		SNAP4/4.3/10	SNAP4/4.3/20	SNAP4/4.3/30
4.4	4.8 / 5.2 / 5.6	4.3		SNAP4/4.4/10	SNAP4/4.4/20	SNAP4/4.4/30
4.5	5.2 / 5.6 / 6.0	4.4		SNAP4/4.5/10	SNAP4/4.5/20	SNAP4/4.5/30
4.6	5.2 / 5.6 / 6.0	4.5		SNAP4/4.6/10	SNAP4/4.6/20	SNAP4/4.6/30
4.7	5.2 / 5.6 / 6.0	4.6		SNAP4/4.7/10	SNAP4/4.7/20	SNAP4/4.7/30
4.8	5.2 / 5.6 / 6.0	4.7		SNAP4/4.8/10	SNAP4/4.8/20	SNAP4/4.8/30
4.9	5.6 / 6.0 / 6.4	4.8		SNAP4/4.9/10	SNAP4/4.9/20	SNAP4/4.9/30
5.0	5.6 / 6.0 / 6.4	4.9		SNAP4/5.0/10	SNAP4/5.0/20	SNAP4/5.0/30

¹⁾ Different chamfer-Ø can be achieved per tool size by using different blades. One blade however produces one defined chamfer-Ø only. The achievable chamfer capacity varies slightly depending on material, blade force, cutting data or application. The indicated dimension is the theoretically possible maximum.

²⁾ The maximum diameter D2 varies depending on the selected blade. Please calculate value with formula. **Please mind any interfering edges.**

ORDERING INFORMATION

- The tool types SNAP2, SNAP3 and SNAP4 are available with cylindrical shank only.
- Attention: The tools are **without blade**. The blades for the tool need to be ordered separately. Please refer to page 105 for GS geometry.

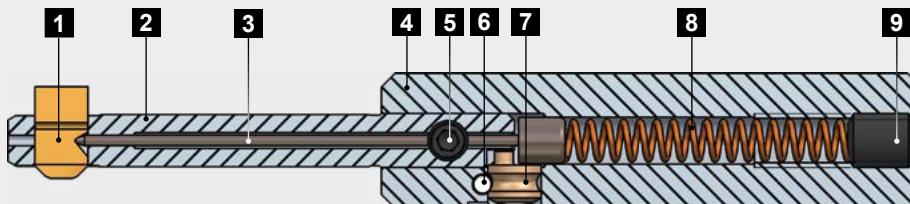

Spare Parts

Pos.	Description	Part No.
1	Blade	see below
2	Blade housing	see page 131
3	Control bolt	GH-Q-E-0236 (NL: 10.0 mm) GH-Q-E-0237 (NL: 20.0 mm) GH-Q-E-0238 (NL: 30.0 mm)
4	Tool body SNAP2-4 Ø10.0 h6	GH-Q-G-5024
	Tool body assembly SNAP2-4 Ø10.0 h6 incl. Excenter GH-S-E-0031 incl. Roll pin GH-C-E-0811	GH-Q-G-5025
5	Locking pin M3x3.3	GH-H-S-1075
6	Roll pin SNAP2-4	GH-C-E-0811
7	Excenter SNAP2-4	GH-S-E-0031
8	Spring Ø3.2xØ0.45x23.0	GH-H-F-0047
9	Set screw M4x5.0 DIN913 Wrench SW1.5 zu Pos. 9	GH-H-S-0134 GH-H-S-2101

Blades GS Geometry 90°

Chamfer-Ø ¹	Part No. forward and backward cutting		backward cutting only	
	Coating A	Coating D	Coating A	Coating D
4.4	GH-Q-M-40381*	GH-Q-M-40382	GH-Q-M-40981	GH-Q-M-40982
4.8	GH-Q-M-40421*	GH-Q-M-40422	GH-Q-M-41021	GH-Q-M-41022
5.2	GH-Q-M-40461*	GH-Q-M-40462	GH-Q-M-41061	GH-Q-M-41062
5.6	GH-Q-M-40501*	GH-Q-M-40502	GH-Q-M-41101	GH-Q-M-41102
6.0	GH-Q-M-40541*	GH-Q-M-40542	GH-Q-M-41141	GH-Q-M-41142
6.4	GH-Q-M-40581*	GH-Q-M-40582	GH-Q-M-41181	GH-Q-M-41182

^{*}) Standard items / Please enquire about stock or delivery times for all non-standard items.

¹⁾ The indicated dimension is the theoretically possible maximum.


Explanations to coatings (please refer to page 99)

A: Coating for steel, titanium, Inconel

D: Coating for aluminium alloys only

Product Selection

SNAP5 Tool Ø 5.0 mm to 10.0 mm

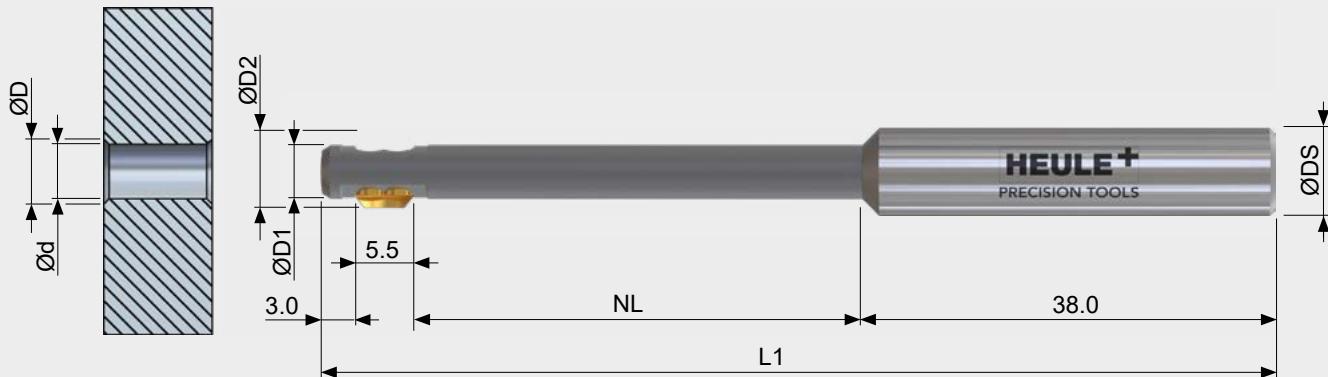

Tool Table

Bore-Ø d	Chamfer-Ø max. ¹ D	Tool-Ø D1	Max-Ø ² D2	Tool length L1	Work. length NL	Shank-Ø DS	Tool without Blade Part No.
5.0-5.5	5.5 / 6.0 / 6.5 / 7.0	4.9	ØD+0.6	88.0	40.0	8.0 h6	SNAP5/5.0
5.5-6.0	6.0 / 6.5 / 7.0 / 7.5	5.4		88.0	40.0	8.0 h6	SNAP5/5.5
6.0-6.5	6.5 / 7.0 / 7.5 / 8.0	5.9		88.0	40.0	8.0 h6	SNAP5/6.0
6.5-7.0	7.0 / 7.5 / 8.0 / 8.5	6.4		88.0	40.0	8.0 h6	SNAP5/6.5
7.0-7.5	7.5 / 8.0 / 8.5 / 9.0	6.9		88.0	40.0	8.0 h6	SNAP5/7.0
7.5-8.0	8.0 / 8.5 / 9.0 / 9.5	7.4		88.0	40.0	8.0 h6	SNAP5/7.5
8.0-8.5	8.5 / 9.0 / 9.5 / 10.0	7.8		98.0	50.0	10.0 h6	SNAP5/8.0
8.5-9.0	9.0 / 9.5 / 10.0 / 10.5	8.3		98.0	50.0	10.0 h6	SNAP5/8.5
9.0-9.5	9.5 / 10.0 / 10.5 / 11.0	8.8		98.0	50.0	10.0 h6	SNAP5/9.0
9.5-10.0	10.0 / 10.5 / 11.0 / 11.5	9.3		98.0	50.0	10.0 h6	SNAP5/9.5
10.0-10.5	10.5 / 11.0 / 11.5 / 12.0	9.8		107.0	50.0	12.0 h6	SNAP5/10.0

¹⁾ Different chamfer-Ø can be achieved per tool size by using different blades. One blade however produces one defined chamfer-Ø only. The achievable chamfer capacity varies slightly depending on material, blade force, cutting data or application. The indicated dimension is the theoretically possible maximum.


²⁾ The maximum diameter D2 varies depending on the selected blade. Please calculate value with formula. **Please mind any interfering edges.**

ORDERING INFORMATION

- Standard shank for tool part numbers without any addition = Cylindrical shank
With addition: "-HB" = Weldon shank or "-HE" = Whistle Notch shank (see page 99)
- Attention: The tools are **without blade**. The blades for the tool need to be ordered separately.
Please refer to page 107 for GS geometry.

WARNING NOTICE:

Blades for SNAP5 tools and blades for Thread tools are **not** interchangeable!

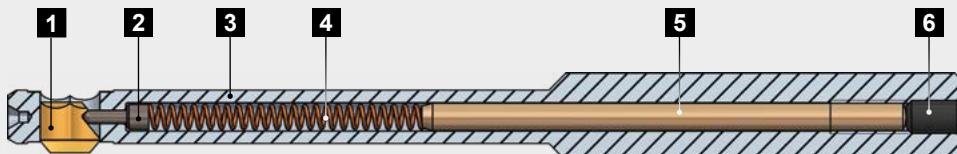

Spare parts

Pos.	Description	Part No.
1	Blade	see below
2	Control bolt Ø1.2	GH-Q-E-0008
3	Tool body	see page 132
4	Spring Ø0.35 x Ø0.35 x 30.0	GH-H-F-0019
5	SNAP Distance pin Ø2.5 x 45.0	GH-Q-E-0041
	SNAP Distance pin Ø2.5 x 55.0	GH-Q-E-0068
	SNAP Distance pin Ø2.5 x 65.0	GH-Q-E-0067
6	Set screw M3 x 5.0 DIN 913	GH-H-S-0127
	Wrench SW1.5 to Pos. 6 (not included)	GH-H-S-2101

Blades GS Geometry 90°

Chamfer-Ø ¹	Part No. forward and backward cutting		backward cutting only	
	Coating A	Coating D	Coating A	Coating D
5.5	GH-Q-M-30204*	GH-Q-M-30404	GH-Q-M-31204	GH-Q-M-31404
6.0	GH-Q-M-30205*	GH-Q-M-30405	GH-Q-M-31205	GH-Q-M-31405
6.5	GH-Q-M-30206*	GH-Q-M-30406	GH-Q-M-31206	GH-Q-M-31406
7.0	GH-Q-M-30207*	GH-Q-M-30407	GH-Q-M-31207	GH-Q-M-31407
7.5	GH-Q-M-30208*	GH-Q-M-30408	GH-Q-M-31208	GH-Q-M-31408
8.0	GH-Q-M-30209*	GH-Q-M-30409	GH-Q-M-31209	GH-Q-M-31409
8.5	GH-Q-M-30210*	GH-Q-M-30410	GH-Q-M-31210	GH-Q-M-31410
9.0	GH-Q-M-30211*	GH-Q-M-30411	GH-Q-M-31211	GH-Q-M-31411
9.5	GH-Q-M-30212*	GH-Q-M-30412	GH-Q-M-31212	GH-Q-M-31412
10.0	GH-Q-M-30213*	GH-Q-M-30413	GH-Q-M-31213	GH-Q-M-31413
10.5	GH-Q-M-30214*	GH-Q-M-30414	GH-Q-M-31214	GH-Q-M-31414
11.0	GH-Q-M-30215*	GH-Q-M-30415	GH-Q-M-31215	GH-Q-M-31415
11.5	GH-Q-M-30216*	GH-Q-M-30416	GH-Q-M-31216	GH-Q-M-31416
12.0	GH-Q-M-30217*	GH-Q-M-30417	GH-Q-M-31217	GH-Q-M-31417
12.5	GH-Q-M-30218*	GH-Q-M-30418	GH-Q-M-31218	GH-Q-M-31418
13.0	GH-Q-M-30219*	GH-Q-M-30419	GH-Q-M-31219	GH-Q-M-31419

^{*) Standard items / Please enquire about stock or delivery times for all non-standard items.}

¹⁾ The indicated dimension is the theoretically possible maximum.

Explanations to coatings (please refer to page 99)

A: Coating for steel, titanium, Inconel

D: Coating for aluminium alloys only

Product Selection

SNAP8 Tool Ø 8.0 mm to 12.0 mm



Tool Table


Tool without Blade				
Bore-Ø d	Chamfer-Ø max. ¹ D	Tool-Ø D1	Max-Ø ² D2	Part No.
8.0 - 8.5	8.5 / 9.0	7.8		SNAP8/8.0
8.5 - 9.0	9.0 / 9.5 / 10.0	8.3		SNAP8/8.5
9.0 - 9.5	9.5 / 10.0 / 10.5	8.8		SNAP8/9.0
9.5 - 10.0	10.0 / 10.5 / 11.0	9.3		SNAP8/9.5
10.0 - 10.5	10.5 / 11.0 / 11.5	9.8	ØD + 0.6	SNAP8/10.0
10.5 - 11.0	11.0 / 11.5 / 12.0	10.3		SNAP8/10.5
11.0 - 11.5	11.5 / 12.0 / 12.5	10.8		SNAP8/11.0
11.5 - 12.0	12.0 / 12.5 / 13.0	11.3		SNAP8/11.5
12.0 - 12.5	12.5 / 13.0 / 13.5	11.8		SNAP8/12.0

¹⁾ Different chamfer-Ø can be achieved per tool size by using different blades. One blade however produces one defined chamfer-Ø only. The achievable chamfer capacity varies slightly depending on material, blade force, cutting data or application. The indicated dimension is the theoretically possible maximum.

²⁾ The maximum diameter D2 varies depending on the selected blade. Please calculate value with formula. **Please mind any interfering edges.**

ORDERING INFORMATION

- Standard shank for tool part numbers without any addition = Cylindrical shank
With addition: "-HB" = Weldon shank or "-HE" = Whistle Notch shank (see page 99)
- Attention: The tools are **without blade**. The blades for the tool need to be ordered separately.
Please refer to page 109 for GS geometry and to page 123 for DF geometry.

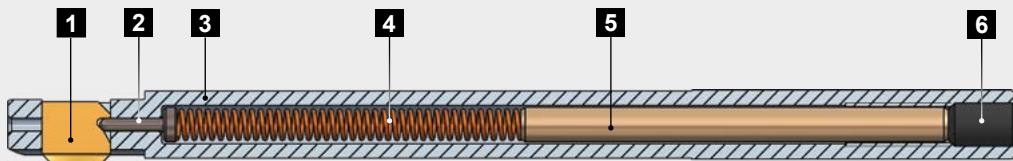

Spare Parts

Pos.	Description	Part No.
1	Blade	see below
2	Control bolt Ø1.5	GH-Q-E-0002
3	Tool body	see page 132
4	Spring Ø3.7 x Ø0.5 x 48.0	GH-H-F-0007
5	SNAP Distance pin Ø4 x 50.0	GH-Q-E-0028
6	Set screw M5 x 8.0 DIN 913	GH-H-S-0119
	Wrench SW2.5 to Pos. 6 (not included)	GH-H-S-2100

Blades GS Geometry 90°

Chamfer-Ø ¹	Part No. forward and backward cutting		backward cutting only	
	Coating T	Coating A	Coating T	Coating A
8.5	GH-Q-M-03720*	GH-Q-M-03820	GH-Q-M-05720	GH-Q-M-05820
9.0	GH-Q-M-03721*	GH-Q-M-03821	GH-Q-M-05721	GH-Q-M-05821
9.5	GH-Q-M-03722*	GH-Q-M-03822	GH-Q-M-05722	GH-Q-M-05822
10.0	GH-Q-M-03723*	GH-Q-M-03823	GH-Q-M-05723	GH-Q-M-05823
10.5	GH-Q-M-03724*	GH-Q-M-03824	GH-Q-M-05724	GH-Q-M-05824
11.0	GH-Q-M-03725*	GH-Q-M-03825	GH-Q-M-05725	GH-Q-M-05825
11.5	GH-Q-M-03726*	GH-Q-M-03826	GH-Q-M-05726	GH-Q-M-05826
12.0	GH-Q-M-03727*	GH-Q-M-03827	GH-Q-M-05727	GH-Q-M-05827
12.5	GH-Q-M-03728*	GH-Q-M-03828	GH-Q-M-05728	GH-Q-M-05828
13.0	GH-Q-M-03729*	GH-Q-M-03829	GH-Q-M-05729	GH-Q-M-05829
13.5	GH-Q-M-03730*	GH-Q-M-03830	GH-Q-M-05730	GH-Q-M-05830

^{*) Standard items / Please enquire about stock or delivery times for all non-standard items.}

¹⁾ The indicated dimension is the theoretically possible maximum.

Explanations to coatings (please refer to page 99)

T: Standard coating

A: Coating for increased requirements

Blade range with DF geometry (please refer to page 123)

Product Selection

SNAP12 Tool Ø 12.0mm to 20.0 mm



Tool Table

Bore-Ø d	Chamfer-Ø max. ¹ D	Tool-Ø D1	Max-Ø ² D2	Tool without Blade Part No.
12.0 - 13.5	12.5 / 13.0 / 13.5 / 14.0	11.8		SNAP12/12.0
12.5 - 14.0	13.0 / 13.5 / 14.0 / 14.5	12.3		SNAP12/12.5
13.0 - 14.5	13.5 / 14.0 / 14.5 / 15.0	12.8		SNAP12/13.0
13.5 - 15.0	14.0 / 14.5 / 15.0 / 15.5	13.3		SNAP12/13.5
14.0 - 15.5	14.5 / 15.0 / 15.5 / 16.0	13.8		SNAP12/14.0
14.5 - 16.0	15.0 / 15.5 / 16.0 / 16.5	14.3		SNAP12/14.5
15.0 - 16.5	15.5 / 16.0 / 16.5 / 17.0	14.8		SNAP12/15.0
15.5 - 17.0	16.0 / 16.5 / 17.0 / 17.5	15.3		SNAP12/15.5
16.0 - 17.5	16.5 / 17.0 / 17.5 / 18.0	15.8		SNAP12/16.0
16.5 - 18.0	17.0 / 17.5 / 18.0 / 18.5	16.3		SNAP12/16.5
17.0 - 18.5	17.5 / 18.0 / 18.5 / 19.0	16.8		SNAP12/17.0
17.5 - 19.0	18.0 / 18.5 / 19.0 / 19.5	17.3		SNAP12/17.5
18.0 - 19.5	18.5 / 19.0 / 19.5 / 20.0	17.8		SNAP12/18.0
18.5 - 20.0	19.0 / 19.5 / 20.0 / 20.5	18.3		SNAP12/18.5
19.0 - 20.5	19.5 / 20.0 / 20.5 / 21.0	18.8		SNAP12/19.0
19.5 - 21.0	20.0 / 20.5 / 21.0 / 21.5	19.3		SNAP12/19.5
20.0 - 21.5	20.5 / 21.0 / 21.5 / 22.0	19.8		SNAP12/20.0


ØD + 0.8

¹⁾ Different chamfer-Ø can be achieved per tool size by using different blades. One blade however produces one defined chamfer-Ø only. The achievable chamfer capacity varies slightly depending on material, blade force, cutting data or application. The indicated dimension is the theoretically possible maximum.

²⁾ The maximum diameter D2 varies depending on the selected blade. Please calculate value with formula. **Please mind any interfering edges.**

ORDERING INFORMATION:

- Standard shank for tool part numbers without any addition = Cylindrical shank
With addition: "-HB" = Weldon shank or "-HE" = Whistle Notch shank (see page 99)
- Attention: The tools are **without blade**. The blades for the tool need to be ordered separately.
Please refer to page 111 for GS geometry and to page 123 for DF geometry.

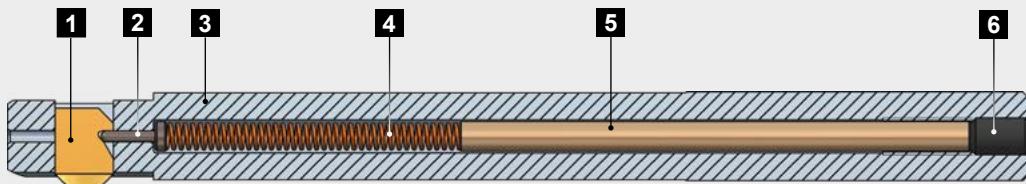

Spare Parts

Pos.	Description	Part No.
1	Blade	see below
2	Control bolt Ø1.5	GH-Q-E-0002
3	Tool body	see page 132
4	Spring Ø3.7 x Ø0.5 x 48.0	GH-H-F-0007
5	SNAP Distance pin Ø4.0 x 70.0	GH-Q-E-0032
6	Set screw M5 x 8.0 DIN 913	GH-H-S-0119
	Wrench SW2.5 to Pos. 6 (not included)	GH-H-S-2100

Blades GS Geometry 90°

Chamfer-Ø ¹	Part No.		backward cutting only	
	forward and backward cutting		Coating T	Coating A
12.5	GH-Q-M-03740*	GH-Q-M-03840	GH-Q-M-05740	GH-Q-M-05840
13.0	GH-Q-M-03741*	GH-Q-M-03841	GH-Q-M-05741	GH-Q-M-05841
13.5	GH-Q-M-03742*	GH-Q-M-03842	GH-Q-M-05742	GH-Q-M-05842
14.0	GH-Q-M-03743*	GH-Q-M-03843	GH-Q-M-05743	GH-Q-M-05843
14.5	GH-Q-M-03744*	GH-Q-M-03844	GH-Q-M-05744	GH-Q-M-05844
15.0	GH-Q-M-03745*	GH-Q-M-03845	GH-Q-M-05745	GH-Q-M-05845
15.5	GH-Q-M-03746*	GH-Q-M-03846	GH-Q-M-05746	GH-Q-M-05846
16.0	GH-Q-M-03747*	GH-Q-M-03847	GH-Q-M-05747	GH-Q-M-05847
16.5	GH-Q-M-03748*	GH-Q-M-03848	GH-Q-M-05748	GH-Q-M-05848
17.0	GH-Q-M-03749*	GH-Q-M-03849	GH-Q-M-05749	GH-Q-M-05849
17.5	GH-Q-M-03750*	GH-Q-M-03850	GH-Q-M-05750	GH-Q-M-05850
18.0	GH-Q-M-03751*	GH-Q-M-03851	GH-Q-M-05751	GH-Q-M-05851
18.5	GH-Q-M-03752*	GH-Q-M-03852	GH-Q-M-05752	GH-Q-M-05852
19.0	GH-Q-M-03753*	GH-Q-M-03853	GH-Q-M-05753	GH-Q-M-05853
19.5	GH-Q-M-03754*	GH-Q-M-03854	GH-Q-M-05754	GH-Q-M-05854
20.0	GH-Q-M-03755*	GH-Q-M-03855	GH-Q-M-05755	GH-Q-M-05855
20.5	GH-Q-M-03756*	GH-Q-M-03856	GH-Q-M-05756	GH-Q-M-05856
21.0	GH-Q-M-03757*	GH-Q-M-03857	GH-Q-M-05757	GH-Q-M-05857
21.5	GH-Q-M-03758*	GH-Q-M-03858	GH-Q-M-05758	GH-Q-M-05858
22.0	GH-Q-M-03759*	GH-Q-M-03859	GH-Q-M-05759	GH-Q-M-05859

^{*}) Standard items / Please enquire about stock or delivery times for all non-standard items.

¹⁾ The indicated dimension is the theoretically possible maximum.

Explanations to coatings (please refer to page 99)

T: Standard coating

A: Coating for increased requirements

Blade range with DF geometry (please refer to page 123)

Product Selection

SNAP20 Tool Ø 20.0mm to 35.0 mm



Tool Table


Tool without Blade				
Bore-Ø d	Chamfer-Ø max. ¹ D	Tool-Ø D1	Max.-Ø ² D2	Part No.
20.0-22.5	21.0 / 22.0 / 23.0	19.8		SNAP20/20.0
21.0-23.5	22.0 / 23.0 / 24.0	20.8		SNAP20/21.0
22.0-24.5	23.0 / 24.0 / 25.0	21.8		SNAP20/22.0
23.0-25.5	24.0 / 25.0 / 26.0	22.8		SNAP20/23.0
24.0-26.5	25.0 / 26.0 / 27.0	23.8		SNAP20/24.0
25.0-27.5	26.0 / 27.0 / 28.0	24.8		SNAP20/25.0
26.0-28.5	27.0 / 28.0 / 29.0	25.8		SNAP20/26.0
27.0-29.5	28.0 / 29.0 / 30.0	26.8		SNAP20/27.0
28.0-30.5	29.0 / 30.0 / 31.0	27.8	ØD + 1.0	SNAP20/28.0
29.0-31.5	30.0 / 31.0 / 32.0	28.8		SNAP20/29.0
30.0-32.5	31.0 / 32.0 / 33.0	29.8		SNAP20/30.0
31.0-33.5	32.0 / 33.0 / 34.0	30.8		SNAP20/31.0
32.0-34.5	33.0 / 34.0 / 35.0	31.8		SNAP20/32.0
33.0-35.5	34.0 / 35.0 / 36.0	32.8		SNAP20/33.0
34.0-36.5	35.0 / 36.0 / 37.0	33.8		SNAP20/34.0
35.0-37.5	36.0 / 37.0 / 38.0	34.8		SNAP20/35.0

¹⁾ Different chamfer-Ø can be achieved per tool size by using different blades. One blade however produces one defined chamfer-Ø only. The achievable chamfer capacity varies slightly depending on material, blade force, cutting data or application. The indicated dimension is the theoretically possible maximum.

²⁾ The maximum diameter D2 varies depending on the selected blade. Please calculate value with formula. **Please mind any interfering edges.**

ORDERING INFORMATION:

- Standard shank for tool part numbers without any addition = Cylindrical shank
With addition: "-HB" = Weldon shank or "-HE" = Whistle Notch shank (see page 99)
- Attention: The tools are **without blade**. The blades for the tool need to be ordered separately.
Please refer to page 113 for GS geometry and to page 124 for DF geometry.

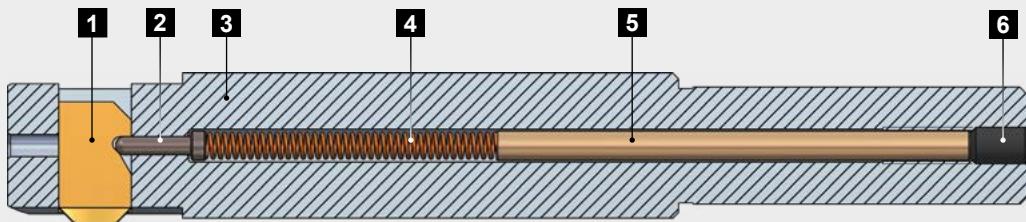

Spare Parts

Pos.	Description	Part No.
1	Blade	see below
2	Control bolt Ø2.5	GH-Q-E-0003
3	Tool body	see page 132f.
4	Spring Ø4.3 x Ø0.6 x 52.0	GH-H-F-0011
5	SNAP Distance pin Ø4 x 65.0	GH-Q-E-0031
6	Set screw M5 x 8.0 DIN 913 Wrench SW2.5 to Pos. 6 (not included)	GH-H-S-0119 GH-H-S-2100

Blades GS Geometry 90°

Chamfer-Ø ¹	Part No. forward and backward cutting		backward cutting only	
	Coating T	Coating A	Coating T	Coating A
21.0	GH-Q-M-03770*	GH-Q-M-03870	GH-Q-M-05770	GH-Q-M-05870
22.0	GH-Q-M-03771*	GH-Q-M-03871	GH-Q-M-05771	GH-Q-M-05871
23.0	GH-Q-M-03772*	GH-Q-M-03872	GH-Q-M-05772	GH-Q-M-05872
24.0	GH-Q-M-03773*	GH-Q-M-03873	GH-Q-M-05773	GH-Q-M-05873
25.0	GH-Q-M-03774*	GH-Q-M-03874	GH-Q-M-05774	GH-Q-M-05874
26.0	GH-Q-M-03775*	GH-Q-M-03875	GH-Q-M-05775	GH-Q-M-05875
27.0	GH-Q-M-03776*	GH-Q-M-03876	GH-Q-M-05776	GH-Q-M-05876
28.0	GH-Q-M-03777*	GH-Q-M-03877	GH-Q-M-05777	GH-Q-M-05877
29.0	GH-Q-M-03778*	GH-Q-M-03878	GH-Q-M-05778	GH-Q-M-05878
30.0	GH-Q-M-03779*	GH-Q-M-03879	GH-Q-M-05779	GH-Q-M-05879
31.0	GH-Q-M-03780*	GH-Q-M-03880	GH-Q-M-05780	GH-Q-M-05880
32.0	GH-Q-M-03781*	GH-Q-M-03881	GH-Q-M-05781	GH-Q-M-05881
33.0	GH-Q-M-03782*	GH-Q-M-03882	GH-Q-M-05782	GH-Q-M-05882
34.0	GH-Q-M-03783*	GH-Q-M-03883	GH-Q-M-05783	GH-Q-M-05883
35.0	GH-Q-M-03784*	GH-Q-M-03884	GH-Q-M-05784	GH-Q-M-05884
36.0	GH-Q-M-03785*	GH-Q-M-03885	GH-Q-M-05785	GH-Q-M-05885
37.0	GH-Q-M-03786*	GH-Q-M-03886	GH-Q-M-05786	GH-Q-M-05886
38.0	GH-Q-M-03787*	GH-Q-M-03887	GH-Q-M-05787	GH-Q-M-05887

^{*}) Standard items / Please enquire about stock or delivery times for all non-standard items.

¹⁾ The indicated dimension is the theoretically possible maximum.


Explanations to coatings (please refer to page 99)

T: Standard coating

A: Coating for increased requirements

Blade range with DF geometry (please refer to page 124)

SNAP Thread Tool M2.5 / M3 / M4 / M5

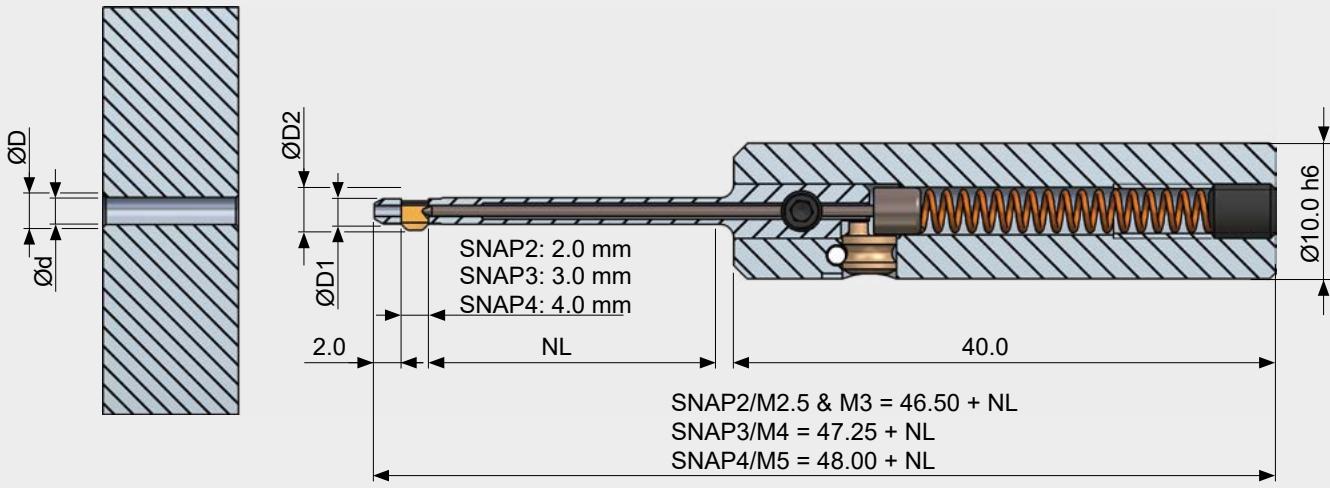

Tool Table

Tool without Blade							
Bore-Ø d	Thread ³ D	Chamf.-Ø ¹ D	Tool-Ø D1	Max.-Ø ² D2	Part No. NL = 10.0 mm	Part No. NL = 20.0 mm	Part No. NL = 30.0 mm
$\varnothing 2.05$	M2.5	2.8	2.0	3.0	SNAP2/M2.5/10	SNAP2/M2.5/20	-
$\varnothing 2.5$	M3	3.4	2.45	3.6	SNAP2/M3/10	SNAP2/M3/20	-
$\varnothing 3.3$	M4	4.5	3.2	4.8	SNAP3/M4/10	SNAP3/M4/20	SNAP3/M4/30
$\varnothing 4.2$	M5	5.6	4.1	6.0	SNAP4/M5/10	SNAP4/M5/20	SNAP4/M5/30


¹⁾ The achievable chamfer capacity varies slightly depending on material, blade force, cutting data or application. The indicated dimension is the theoretically possible maximum.

²⁾ Please mind any interfering edges.

³⁾ The tools for the thread types M6, M8, M10, M12, M14 are listed on page 116f.

ORDERING INFORMATION:

- The tool types SNAP2, SNAP3 and SNAP4 are available with cylindrical shank only.
- Attention: The tools are **without blade**. The blades for the tool need to be ordered separately. Please refer to page 115 for GS geometry.

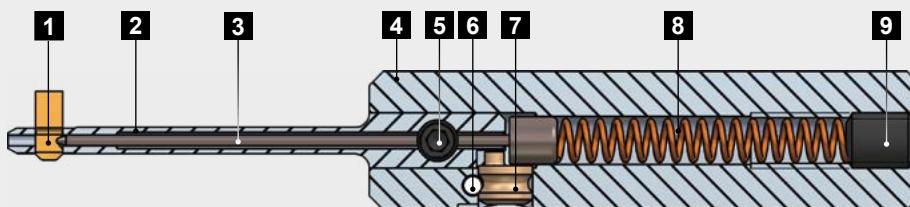

Spare Parts

Pos.	Description	Part No.	NL 10.0 mm	NL 20.0 mm	NL 30.0 mm
1	Blade	see below	see below	see below	
2	Blade housing SNAP2/M2.5/.. Blade housing SNAP2/M3/.. Blade housing SNAP3/M4/.. Blade housing SNAP4/M5/..	GH-Q-N-0015 GH-Q-N-0016 GH-Q-N-0035 GH-Q-N-0055	GH-Q-N-0075 GH-Q-N-0076 GH-Q-N-0095 GH-Q-N-0115	GH-Q-N-0075 GH-Q-N-0076 GH-Q-N-0155 GH-Q-N-0175	
3	Control bolt SNAP2/M2.5/.. Control bolt SNAP2/M3/.. Control bolt SNAP3/M4/.. Control bolt SNAP4/M5/..	GH-Q-E-0254 GH-Q-E-0236 GH-Q-E-0236 GH-Q-E-0236	GH-Q-E-0256 GH-Q-E-0237 GH-Q-E-0237 GH-Q-E-0237	GH-Q-E-0256 GH-Q-E-0237 GH-Q-E-0238 GH-Q-E-0238	
4	Tool body Tool body assembly incl. Excenter GH-S-E-0031 incl. Roll pin GH-C-E-0811	GH-Q-G-5024 GH-Q-G-5025	GH-Q-G-5024 GH-Q-G-5025	GH-Q-G-5024 GH-Q-G-5025	
5	Locking screw M3x3.3	GH-H-S-1075	GH-H-S-1075	GH-H-S-1075	
6	Roll pin SNAP2-4	GH-C-E-0811	GH-C-E-0811	GH-C-E-0811	
7	Excenter SNAP2-4	GH-S-E-0031	GH-S-E-0031	GH-S-E-0031	
8	Spring Ø3.2xØ0.45x23.0	GH-H-F-0047	GH-H-F-0047	GH-H-F-0047	
9	Set screw M4x5.0 DIN913 Wrench SW1.5 to Pos. 9	GH-H-S-0134 GH-H-S-2101	GH-H-S-0134 GH-H-S-2101	GH-H-S-0134 GH-H-S-2101	

Blades GS Geometry 90°

Chamfer-Ø ¹	Part No. forward and backward cutting		backward cutting only	
	Coating A	Coating D	Coating A	Coating D
Ø2.8	GH-Q-M-41501	GH-Q-M-41502	GH-Q-M-41601	GH-Q-M-41602
Ø3.4	GH-Q-M-41511	GH-Q-M-41512	GH-Q-M-41611	GH-Q-M-41612
Ø4.5	GH-Q-M-41521	GH-Q-M-41522	GH-Q-M-41621	GH-Q-M-41622
Ø5.6	GH-Q-M-41531	GH-Q-M-41532	GH-Q-M-41631	GH-Q-M-41632


¹⁾ The indicated dimension is the theoretically possible maximum.

Explanations to coatings (please refer to page 99)

A: Coating for increased requirements

D: Coating for aluminium alloys only - available upon customer request only

SNAP Thread Tool M6 / M8 / M10 / M12 / M14

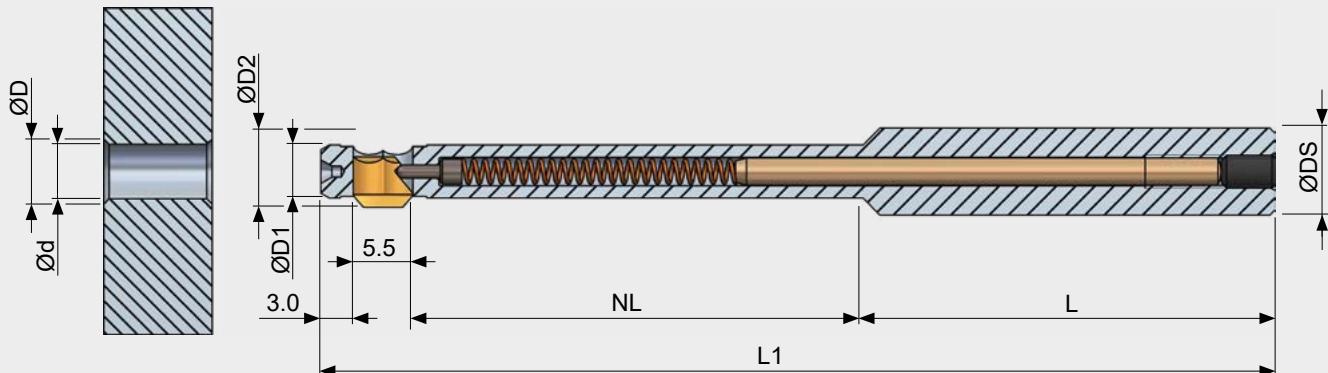

Tool Table

Tool without Blade									
Bore-Ø d	Thread ³	Chamfer-Ø ¹ D	Tool-Ø D1	Max.-Ø ² D2	Tool length L1	Work length NL	Shank L	Shank-Ø DS	Part No.
5.0	M6	6.5	4.9	7.3	88.0	40.0	38.0	8.0 h6	SNAP5/M6
6.8	M8	8.5	6.7	9.3	88.0	40.0	38.0	8.0 h6	SNAP5/M8
8.5	M10	10.5	8.3	11.3	100.0	50.0	40.0	10.0 h6	SNAP5/M10
10.2	M12	12.5	10.0	13.1	100.0	50.0	40.0	10.0 h6	SNAP5/M12
12.0	M14	14.5	11.8	15.1	100.0	50.0	40.0	10.0 h6	SNAP5/M14

¹⁾ The achievable chamfer capacity varies slightly depending on material, blade force, cutting data or application. The indicated dimension is the theoretically possible maximum.

²⁾ Please mind any interfering edges.


³⁾ The tools for thread types M2.5, M3, M4, M5 are on page 114f.

ORDERING INFORMATION

- Standard shank for tool part numbers without any addition = Cylindrical shank
With addition: "-HB" = Weldon shank or "-HE" = Whistle Notch shank (please refer to page 99)
- Attention: The tools are **without blade**. The blades for the tool need to be ordered separately.
Please refer to page 117 for blade with DRA and DRB geometry.

WARNING NOTICE

The blades of the SNAP5 tools on page 106 and those of the thread tools are **not** interchangeable.

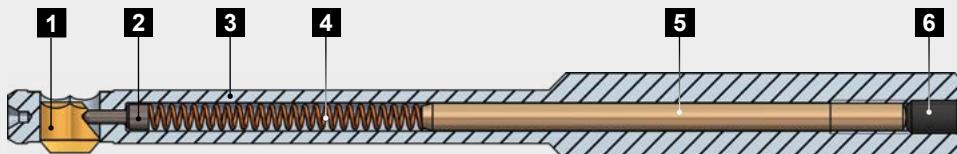

Spare Parts

Pos.	Description	Part No.
1	Blade	see below
2	Control bolt Ø1.5	GH-Q-E-0015
3	Tool body SNAP5/M6 Tool body SNAP5/M8 Tool body SNAP5/M10 Tool body SNAP5/M12 Tool body SNAP5/M14	GH-Q-G-5003 GH-Q-G-5018 GH-Q-G-5010 GH-Q-G-5019 GH-Q-G-5017
4	Spring Ø2.35xØ0.35x30.0	GH-H-F-0019
5	Distance pin Ø2.5x36.0 (M6/M8) Distance pin Ø2.5x50.0 (M10/M12/M14)	GH-Q-E-0049 GH-Q-E-0042
6	Set screw M3x5.0 DIN913 Wrench SW1.5 to Pos. 6	GH-H-S-0127 GH-H-S-2101

Blades DRA Geometry 90° for Standard Materials

Chamfer-Ø ¹	Part No. forward and backward cutting		backward cutting only	
	Coating A	Coating D	Coating A	Coating D
6.5	GH-Q-M-34032	GH-Q-M-34033	GH-Q-M-34532	GH-Q-M-34533
8.5	GH-Q-M-34072	GH-Q-M-34073	GH-Q-M-34572	GH-Q-M-34573
10.5	GH-Q-M-34112	GH-Q-M-34113	GH-Q-M-34612	GH-Q-M-34613
12.5	GH-Q-M-34152	GH-Q-M-34153	GH-Q-M-34652	GH-Q-M-34653
14.5	GH-Q-M-34192	GH-Q-M-34193	GH-Q-M-34692	GH-Q-M-34693

Blades DRB Geometry 90° for very hard and tough Materials

Chamfer-Ø ¹	Part No. forward and backward cutting		backward cutting only	
	Coating A		Coating A	
6.5	GH-Q-M-34042		GH-Q-M-34542	
8.5	GH-Q-M-34082		GH-Q-M-34582	
10.5	GH-Q-M-34122		GH-Q-M-34622	
12.5	GH-Q-M-34162		GH-Q-M-34662	
14.5	GH-Q-M-34202		GH-Q-M-34702	

¹⁾ The indicated dimension is the theoretically possible maximum.


Explanations to coatings (please refer to page 99)

A: Coating for increased requirements



D: Coating for aluminium alloys only - available upon customer request only

SNAP Cassette Systems



SNAP5 Cassette
>> Ø12.6 mm

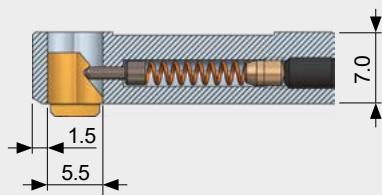

SNAP20 Cassette
>> Ø25.0 mm

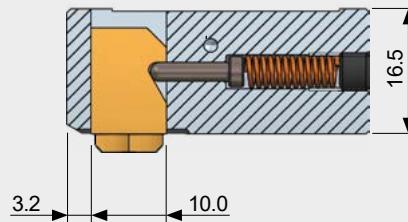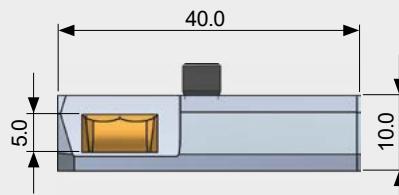

SNAP20 Cassette
>> Ø35.0 mm

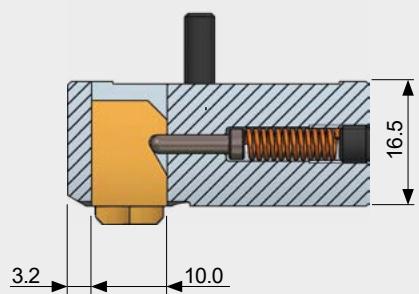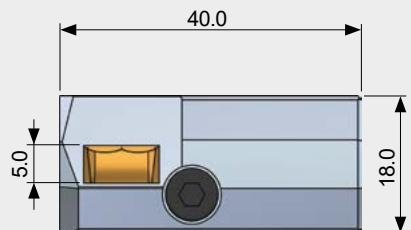




The SNAP Cassette is used for large bore-Ø (larger than Ø35.0 mm). With this cassette the SNAP deburring system is integrated in combi tools and

standard tools. The holder can be ordered from us or the customer can use their own, utilizing the information on page 120f.

Tool Table

Cassette complete without Blade			
Type	from Bore-Ø	Dimensions	Part No.
SNAP5/12.6 Cassette	> Ø12.6 mm ¹⁾	see illustration above	GH-Q-O-1430
SNAP20/25.0 Cassette	> Ø25.0 mm - Ø35.0 mm	see illustration above	GH-Q-O-1130
SNAP20/35.0 Cassette	> Ø35.0 mm	see illustration above	GH-Q-O-1030

¹⁾ The standard range of cassette blades are available for the bore diameter range 20.0 to 150.0 mm. For bore diameters < 20.0 mm, the blades are available on request only.

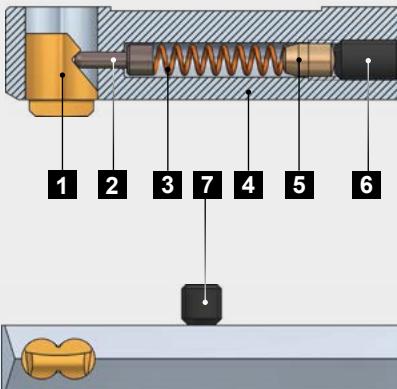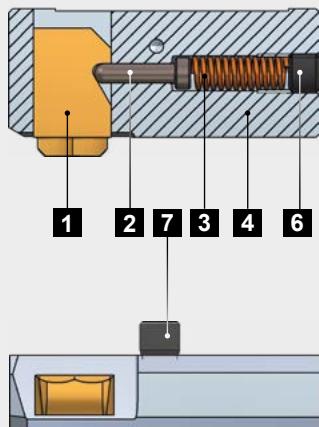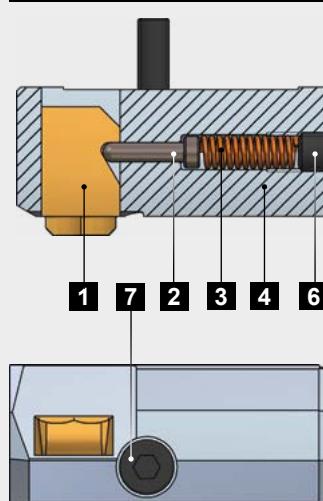SNAP5 Cassette
 $\gt 12.6 \text{ mm}$

SNAP20 Cassette
 $\gt 25.0 \text{ mm}$

SNAP20 Cassette
 $\gt 35.0 \text{ mm}$


Spare Parts

Pos.	Description	SNAP5/12.6	SNAP20/25	SNAP20/35
1	SNAP blade	see below	see below	see below
2	Control bolt	GH-Q-E-0008	GH-Q-E-0003	GH-Q-E-0003
3	Spring	GH-H-F-0027	GH-H-F-0012	GH-H-F-0012
4	Cassette tool body	GH-Q-G-1382	GH-Q-G-1123	GH-Q-G-1034
5	Distance pin	GH-Q-E-0046	-	-
6	Set screw	GH-H-S-0127	GH-H-S-0120	GH-H-S-0120
7	Set screw Wrench to Pos. 7	GH-H-S-0355 GH-H-S-2101	GH-H-S-0202 GH-H-S-2100	GH-H-S-0502 GH-H-S-2100

Cassette Blades with DF Geometry 90°

SNAP5 – Part No.				
forward and backward cutting				
Chamf. ¹⁾	Bore-Ø	Coating A	Coating D	
0.5	20.0-85.0	GH-Q-M-30780*	GH-Q-M-30980	Coating A
1.0	20.0-85.0	GH-Q-M-30781*	GH-Q-M-30981	Coating D
1.5	20.0-85.0	GH-Q-M-30782*	GH-Q-M-30982	GH-Q-M-31780
0.5	90.0-150.0	GH-Q-M-30783*	GH-Q-M-30983	GH-Q-M-31781
1.0	90.0-150.0	GH-Q-M-30784*	GH-Q-M-30984	GH-Q-M-31782
1.5	90.0-150.0	GH-Q-M-30785*	GH-Q-M-30985	GH-Q-M-31783

SNAP20 – Part No.				
forward and backward cutting				
Chamf. ¹⁾		Coating A	Coating T	
0.5		GH-Q-M-01902*	GH-Q-M-01901	Coating A
1.0		GH-Q-M-01905*	GH-Q-M-01904	Coating T
1.5		GH-Q-M-01908*	GH-Q-M-01907	GH-Q-M-01922

^{*)} Standard items / Please enquire about stock or delivery times for all non-standard items.

¹⁾ The indicated dimension is the theoretically possible chamfer capacity / depth maximum.

Explanations to coatings (please refer to page 99)


T: Coating for normal requirements

A: Coating for increased requirements


D: Coating for aluminium alloys only

Installation Dimensions SNAP Cassettes


**SNAP5 Cassette
> Ø12.6 mm**

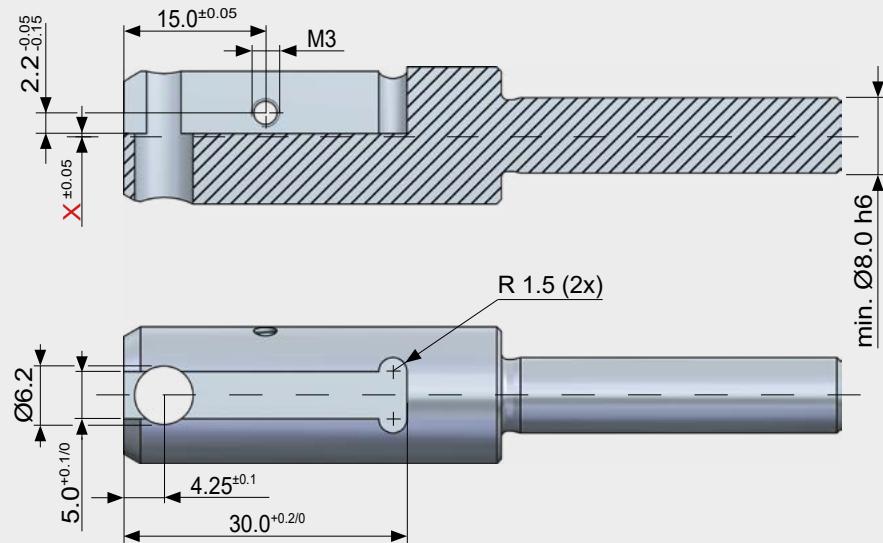

**SNAP20 Cassette
> Ø25.0**

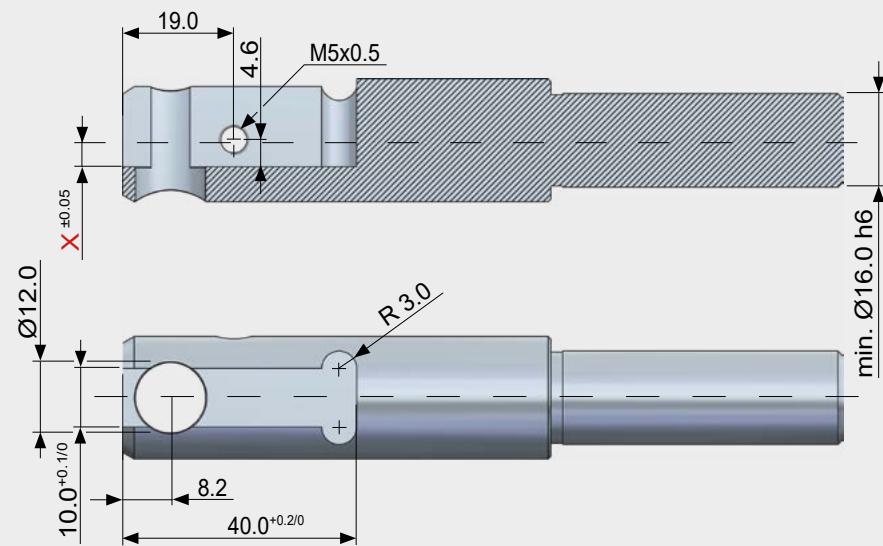


**SNAP20 Cassette
> Ø 35.0**

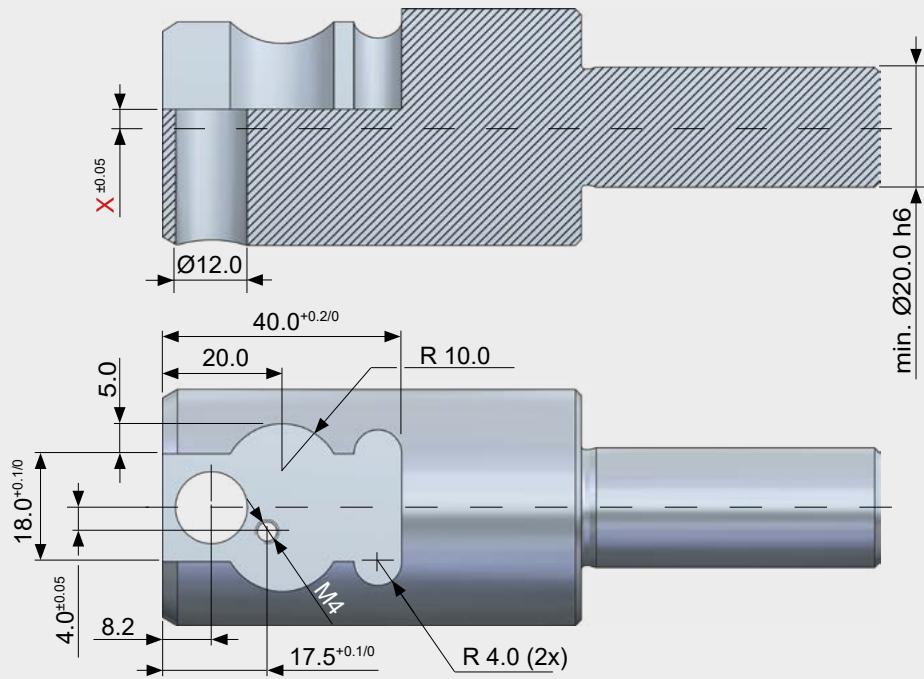

Limiting values

	SNAP5	SNAP20	SNAP20
Bore-Ø	> Ø12.6 mm	> Ø25.0 mm	> Ø35.0 mm
max. ØD	Ød + 3.0 mm	Ød + 3.0 mm	Ød + 3.0 mm
max. ØD1	Ød - 1.0 mm	Ød - 2.0 mm	Ød - 4.0 mm

Installation Dimensions SNAP Cassettes (continued)

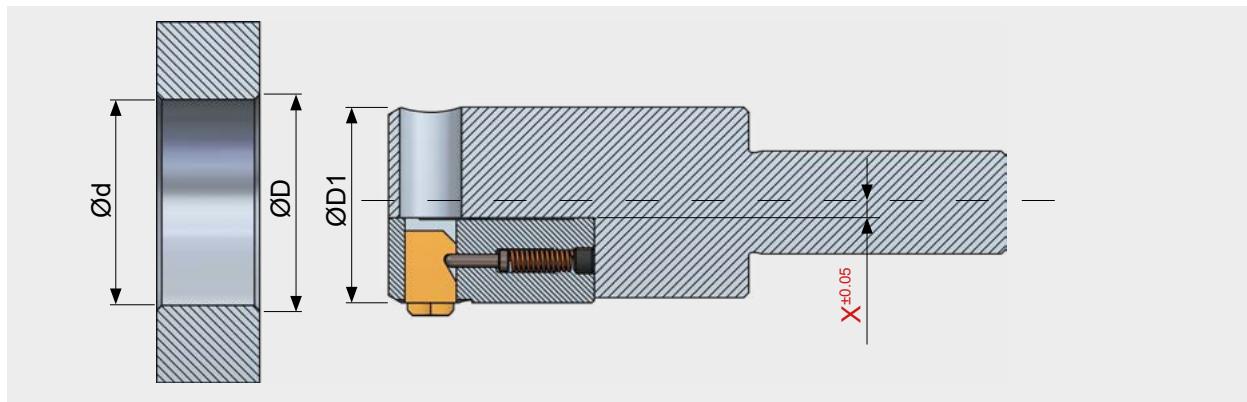

Caption

Bore diameter	Ød
Chamfer diameter	ØD
Tool diameter	ØD1
Locating dimension	X (Must be calculated for every application individually. See formula below.)

SNAP5 > Ø12.6 X = Ød / 2 - 7.3

SNAP20/25.0 X = Ød / 2 - 17.0

SNAP20/35.0 X = Ød / 2 - 17.0


Calculation example installation dimension X

Example SNAP5 Cassette


Given:	Sought:	
	Dimension X	Blade
Bore Ø d: 23.0 mm	X = Ød / 2 - 7.3	
	X = (23.0 mm / 2) - 7.3 mm	
	X = 11.5 mm - 7.3 mm	
	X = 4.2 mm	
Chamfer Ø D: 24.5 mm >> Chamfer width 0.75 mm		1.0 mm
	X = 4.2 mm + (0.75 mm - 1.0 mm)	
	X = 4.2 mm - 0.25 mm	
	X = 3.95 mm	

Comparison GS / DF Blade Geometries

Blades with GS Geometry

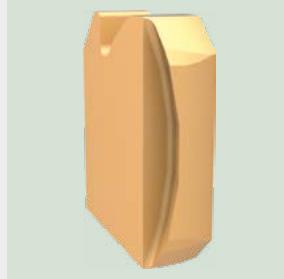

forward and backward cutting

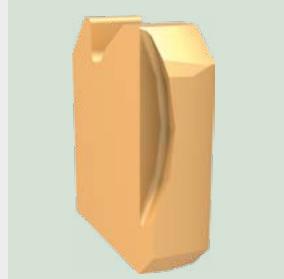


backward cutting only

Blades with DF Geometry



forward and backward cutting

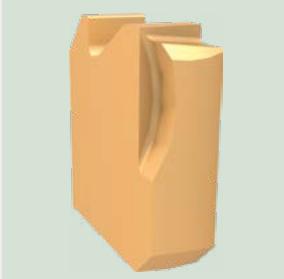

backward cutting only

The blade with the GS geometry is the standard blade. As universal blade it is suitable for most deburring and easy chamfering operations. This blade can also be used in applications where there is slight unevenness on the surface of the component.

Front and back chamfering is achieved by linear feed forward and backward. For back cutting only, a front and back cutting blade can be used also by traversing through the hole in rapid feed without causing damage neither to the front edge of the hole nor to the tool. However, when machining soft materials, it may be necessary to stop the spindle for traversing.

Only when no deburring or chamfering is required or accepted on the front edge of the hole, it is necessary to use the back cutting only blades.

You will find the GS blades in the front section of the catalogue in the blade tables from page 71 onwards.

This blade with DF geometry is mainly used when a defined, tolerated or consistent chamfer size is required. It is also recommended for use on hard materials or on materials with excessive burr formation.

This blade type is responsive to the condition of the machine such as clamping of workpiece and tool as well as a stable machine spindle etc.

If no front chamfer is required, a **back cutting only blade has to be used.**

The upper values of the feed rate for blades with DF geometry listed on page 126 should not be exceeded as blade breakage may result.

The range of DF blades is listed on page 123f.

Blade Range with DF Geometry

SNAP8 Blades with DF Geometry 90°

Part No.	forward and backward cutting		backward cutting only	
	Coating T	Coating A	Coating T	Coating A
Chamfer-Ø ¹				
8.5	GH-Q-M-03120	GH-Q-M-03220	GH-Q-M-05120	GH-Q-M-05220
9.0	GH-Q-M-03121	GH-Q-M-03221	GH-Q-M-05121	GH-Q-M-05221
9.5	GH-Q-M-03122	GH-Q-M-03222	GH-Q-M-05122	GH-Q-M-05222
10.0	GH-Q-M-03123	GH-Q-M-03223	GH-Q-M-05123	GH-Q-M-05223
10.5	GH-Q-M-03124	GH-Q-M-03224	GH-Q-M-05124	GH-Q-M-05224
11.0	GH-Q-M-03125	GH-Q-M-03225	GH-Q-M-05125	GH-Q-M-05225
11.5	GH-Q-M-03126	GH-Q-M-03226	GH-Q-M-05126	GH-Q-M-05226
12.0	GH-Q-M-03127	GH-Q-M-03227	GH-Q-M-05127	GH-Q-M-05227
12.5	GH-Q-M-03128	GH-Q-M-03228	GH-Q-M-05128	GH-Q-M-05228
13.0	GH-Q-M-03129	GH-Q-M-03229	GH-Q-M-05129	GH-Q-M-05229
13.5	GH-Q-M-03130	GH-Q-M-03230	GH-Q-M-05130	GH-Q-M-05230

SNAP12 Blades with DF Geometry 90°

Part No.	forward and backward cutting		backward cutting only	
	Coating T	Coating A	Coating T	Coating A
Chamfer-Ø ¹				
12.5	GH-Q-M-03140	GH-Q-M-03240	GH-Q-M-05140	GH-Q-M-05240
13.0	GH-Q-M-03141	GH-Q-M-03241	GH-Q-M-05141	GH-Q-M-05241
13.5	GH-Q-M-03142	GH-Q-M-03242	GH-Q-M-05142	GH-Q-M-05242
14.0	GH-Q-M-03143	GH-Q-M-03243	GH-Q-M-05143	GH-Q-M-05243
14.5	GH-Q-M-03144	GH-Q-M-03244	GH-Q-M-05144	GH-Q-M-05244
15.0	GH-Q-M-03145	GH-Q-M-03245	GH-Q-M-05145	GH-Q-M-05245
15.5	GH-Q-M-03146	GH-Q-M-03246	GH-Q-M-05146	GH-Q-M-05246
16.0	GH-Q-M-03147	GH-Q-M-03247	GH-Q-M-05147	GH-Q-M-05247
16.5	GH-Q-M-03148	GH-Q-M-03248	GH-Q-M-05148	GH-Q-M-05248
17.0	GH-Q-M-03149	GH-Q-M-03249	GH-Q-M-05149	GH-Q-M-05249
17.5	GH-Q-M-03150	GH-Q-M-03250	GH-Q-M-05150	GH-Q-M-05250
18.0	GH-Q-M-03151	GH-Q-M-03251	GH-Q-M-05151	GH-Q-M-05251
18.5	GH-Q-M-03152	GH-Q-M-03252	GH-Q-M-05152	GH-Q-M-05252
19.0	GH-Q-M-03153	GH-Q-M-03253	GH-Q-M-05153	GH-Q-M-05253
19.5	GH-Q-M-03154	GH-Q-M-03254	GH-Q-M-05154	GH-Q-M-05254
20.0	GH-Q-M-03155	GH-Q-M-03255	GH-Q-M-05155	GH-Q-M-05255
20.5	GH-Q-M-03156	GH-Q-M-03256	GH-Q-M-05156	GH-Q-M-05256
21.0	GH-Q-M-03157	GH-Q-M-03257	GH-Q-M-05157	GH-Q-M-05257
21.5	GH-Q-M-03158	GH-Q-M-03258	GH-Q-M-05158	GH-Q-M-05258
22.0	GH-Q-M-03159	GH-Q-M-03259	GH-Q-M-05159	GH-Q-M-05259

¹⁾ The indicated dimension is the theoretically possible chamfer capacity / depth maximum.

Chamfer-Ø ¹	Part No.		back cutting only	
	forward and backward cutting		Coating T	Coating A
21.0	GH-Q-M-03170	GH-Q-M-03270	GH-Q-M-05170	GH-Q-M-05270
22.0	GH-Q-M-03171	GH-Q-M-03271	GH-Q-M-05171	GH-Q-M-05271
23.0	GH-Q-M-03172	GH-Q-M-03272	GH-Q-M-05172	GH-Q-M-05272
24.0	GH-Q-M-03173	GH-Q-M-03273	GH-Q-M-05173	GH-Q-M-05273
25.0	GH-Q-M-03174	GH-Q-M-03274	GH-Q-M-05174	GH-Q-M-05274
26.0	GH-Q-M-03175	GH-Q-M-03275	GH-Q-M-05175	GH-Q-M-05275
27.0	GH-Q-M-03176	GH-Q-M-03276	GH-Q-M-05176	GH-Q-M-05276
28.0	GH-Q-M-03177	GH-Q-M-03277	GH-Q-M-05177	GH-Q-M-05277
29.0	GH-Q-M-03178	GH-Q-M-03278	GH-Q-M-05178	GH-Q-M-05278
30.0	GH-Q-M-03179	GH-Q-M-03279	GH-Q-M-05179	GH-Q-M-05279
31.0	GH-Q-M-03180	GH-Q-M-03280	GH-Q-M-05180	GH-Q-M-05280
32.0	GH-Q-M-03181	GH-Q-M-03281	GH-Q-M-05181	GH-Q-M-05281
33.0	GH-Q-M-03182	GH-Q-M-03282	GH-Q-M-05182	GH-Q-M-05282
34.0	GH-Q-M-03183	GH-Q-M-03283	GH-Q-M-05183	GH-Q-M-05283
35.0	GH-Q-M-03184	GH-Q-M-03284	GH-Q-M-05184	GH-Q-M-05284
36.0	GH-Q-M-03185	GH-Q-M-03285	GH-Q-M-05185	GH-Q-M-05285
37.0	GH-Q-M-03186	GH-Q-M-03286	GH-Q-M-05186	GH-Q-M-05286
38.0	GH-Q-M-03187	GH-Q-M-03287	GH-Q-M-05187	GH-Q-M-05287

¹⁾ The indicated dimension is the theoretically possible chamfer capacity / depth maximum.

Explanations to coatings (please refer to page 99)

T: Coating for normal requirements

A: Coating for increased requirements

BRITISH SPONSORED
BY THE

Technical Data and Settings

Cutting Data SNAP¹


Material	Condition	Tensile strength (N/mm ²)	Hardness HB	SNAP 2/3/4		SNAP 5/8/12/20 GS	
				Cutting speed (m/min)	Feed (mm/rev)	Cutting speed (m/min)	Feed (mm/rev)
Unalloyed steel		<500	<150	40-70	0.02-0.1	40-70	0.1-0.3
Cast steel*		500 - 850	150 - 250	40-70	0.02-0.1	40-70	0.1-0.3
Grey cast iron*		<500	<150	50-90	0.02-0.1	50-90	0.1-0.3
Ductile cast iron*		300 - 800	90 - 240	40-70	0.02-0.1	40-70	0.1-0.3
Low alloy steel	annealed	<850	<250	40-70	0.02-0.1	40-70	0.1-0.3
	tempered	850 - 1000	250 - 300	30-50	0.02-0.1	30-50	0.1-0.2
	tempered	>1000 - 1200	>300 - 350	30-50	0.02-0.1	30-50	0.1-0.2
High alloy steel	annealed	<850	<250	20-50	0.02-0.1	20-50	0.1-0.2
	tempered	850 - 1100	250 - 320	15-30	0.02-0.1	15-30	0.1-0.15
Stainless steel	ferritic	450 - 650	130 - 190	15-30	0.02-0.05	15-30	0.05-0.15
	austenitic	650 - 900	190 - 270	10-20	0.02-0.05	10-20	0.05-0.15
	martensitic	500 - 700	150 - 200	15-30	0.02-0.05	15-30	0.02-0.15
Special alloy (Inconel, titanium)		<1200	<350	10-20	0.02-0.05	10-20	0.02-0.1
Wrought or cast aluminium alloys				70-120	0.05-0.15	70-120	0.1-0.3
Copper alloy	Brass			60-90	0.02-0.05	60-90	0.05-0.15
	Bronze short-chipping			30-50	0.02-0.05	30-50	0.05-0.15
	Bronze long-chipping			20-30	0.02-0.05	20-30	0.05-0.15

*) We recommend using coolant when machining cast materials.


Material	Condition	Tensile strength (N/mm ²)	Hardness HB	SNAP 5 DF ²		SNAP 5 DR	
				Cutting speed (m/min)	Feed (mm/rev)	Cutting speed (m/min)	Feed (mm/rev)
Unalloyed steel		<500	<150	40-70	0.02-0.08	40-70	0.05-0.1
Cast steel*		500 - 850	150 - 250	40-70	0.02-0.08	40-70	0.05-0.1
Grey cast iron*		<500	<150	50-90	0.02-0.08	50-90	0.05-0.1
Ductile cast iron*		300 - 800	90 - 240	40-70	0.02-0.08	40-70	0.05-0.1
Low alloy steel	annealed	<850	<250	40-70	0.02-0.08	40-70	0.05-0.1
	tempered	850 - 1000	250 - 300	30-50	0.02-0.08	30-50	0.05-0.1
	tempered	>1000 - 1200	>300 - 350	20-40	0.02-0.06	20-40	0.05-0.06
High alloy steel	annealed	<850	<250	20-50	0.02-0.08	20-50	0.05-0.08
	tempered	850 - 1100	250 - 320	15-30	0.02-0.06	15-30	0.02-0.06
Stainless steel	ferritic	450 - 650	130 - 190	15-30	0.02-0.08	15-30	0.05-0.1
	austenitic	650 - 900	190 - 270	10-20	0.02-0.06	10-20	0.05-0.08
	martensitic	500 - 700	150 - 200	15-30	0.02-0.06	15-30	0.02-0.06
Special alloy (Inconel, titanium)		<1200	<350	10-20	0.02-0.06	10-20	0.02-0.06
Wrought or cast aluminium alloys				70-120	0.02-0.1	70-120	0.05-0.2
Copper alloy	Brass			60-90	0.02-0.08	60-90	0.05-0.1
	Bronze short-chipping			30-50	0.02-0.06	30-50	0.05-0.1
	Bronze long-chipping			20-30	0.02-0.06	20-30	0.05-0.1

¹⁾ Please pay attention to the WARNING NOTICE on the bottom of page 127. *) We recommend using coolant when machining cast materials.


²⁾ For cassette tool only - please refer to page 119

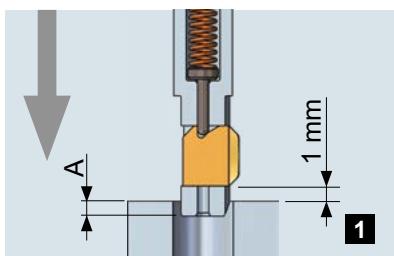


It is not necessary at all to change the sense of rotation or to stop the spindle during the whole process. First, rapid traverse of the tool blade above the top material surface of bore or burr.

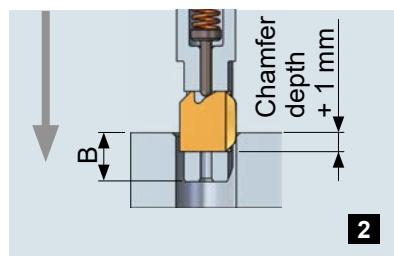


To generate the front chamfer continue in working feed until the blade is completely retracted into the tool.

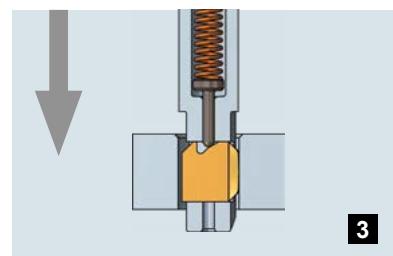


Rapid traverse through the hole. The surface of the hole cannot be damaged.

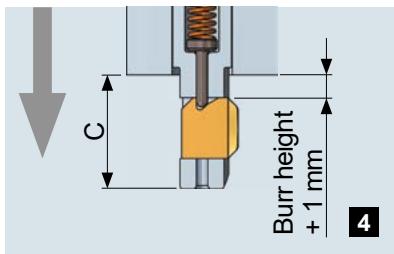

Go 1.0 mm beyond the existing burr in order to reach a safe initial position for the back chamfering.

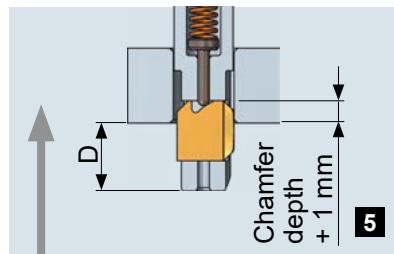

In back working feed the backward chamfering is executed. Proceed with the blade 1.0 mm farther than the planned chamfering depth.

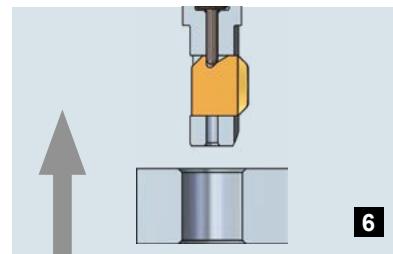

Then exit in rapid traverse to the next bore.

Dimension Table to Programming Information

Tool	A	B	C	D
SNAP2	1.0	3.0	5.0	3.0
SNAP3	1.0	3.5	6.0	3.5
SNAP4	1.0	4.0	7.0	4.0
SNAP5	2.0	6.0	9.5	6.0
SNAP8	3.0	8.0	13.0	8.0
SNAP12	5.5	10.5	15.5	10.5
SNAP20	6.0	12.0	18.0	12.0

WARNING NOTICE - Cutting Data SNAP

All listed cutting data are standard values only! The cutting values depend on the amount of slope of the uneven bore edge. (i.e. high slope ► low cutting value). The feed also depends on the sloping ratio. In case of hard to machine materials or uneven bore edges, we recommend to apply cutting speeds that are at the lower end of the range for uneven bore edges. Cast materials should always be machined using coolant.

Adjusting the Chamfer Size

Blades with GS geometry

In general, the chamfer size is defined by the selected blade (blade length). Each blade produces a defined chamfer size.

The theoretically possible chamfer size maximum can be taken from the column "chamfer-Ø max. D" in the blade tables.


Blades with DF geometry

For SNAP blades with DF or DR geometry (thread tools), the chamfer capacity is defined exclusively by the chamfer-Ø of the blade table. This means that neither the feed rate nor an adjustment of the blade force changes the chamfer size.

For choosing the right feed rate please refer to the cutting data chart on page 126.

The blade force has to be sufficient to enable the blade to extend outwards in the event of swarf ingress.

Setting the Blade Force

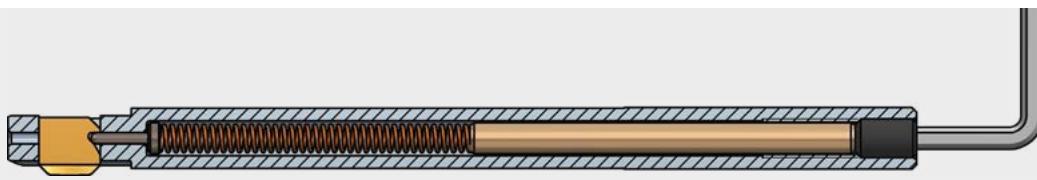

The blade force can be adjusted by the set screw in the rear of the shank. The blade force has to be sufficient to extend the blade to fully after passing the back end of the bore. This ensures that the blade can work with the necessary cutting performance. The tougher the material the tougher the spring should be set. **The blade force however does not influence the chamfer size.** Working with the correct blade pressure increases the blade life and improves the chamfer quality. An extremely tough

material requires a high spring force. For this purpose, the springs can be exchanged (SNAP5: GH-H-F-0041, SNAP8 und SNAP12: GH-H-F-0011).


Turning the set screw clockwise increases the blade force (tough steel, Inconel, titanium). Turning the set screw anti-clockwise reduces the blade force (aluminium).

Adjustment Details Blade Force


Tool	Thread size	Screw-in depth (max.)	Number of revolutions
SNAP2/3/4	M3	6.0 mm	approx. 12 rev.
SNAP5	M3	6.0 mm	approx. 12 rev.
SNAP5 (Thread tools)	M3	14.0 mm	approx. 28 rev.
SNAP8	M5	11.0 mm	approx. 13 rev.
SNAP12	M5	11.0 mm	approx. 13 rev.
SNAP20	M5	11.0 mm	approx. 13 rev.




Tool with SNAP2 blade mounted

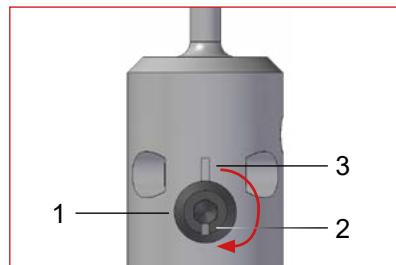


Turn excenter (1) by 180° until the groove of the excenter (2) is 180° opposite to the groove of the tool body (3).

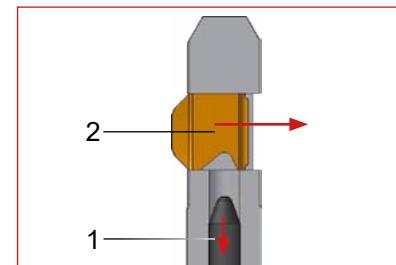

By the movement of the excenter, the control bolt (1) is pulled back out of the blade recess. Then the blade (2) can be easily pushed out in the indicated direction.

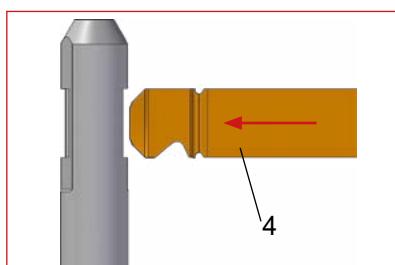


When mounting a new blade with integrated assembly aid (4), please make sure to insert the blade with the cutting geometry first into the blade housing.

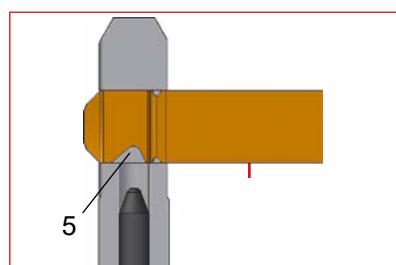

Push the blade so far that the control recess of the blade (5) is over the bolt cross bore. As an optical aid, the cutting geometry should be visible to the full extent on the other side of the blade housing.




Turn back the excenter by 180° until the groove of the excenter is aligned with the groove in the tool body.

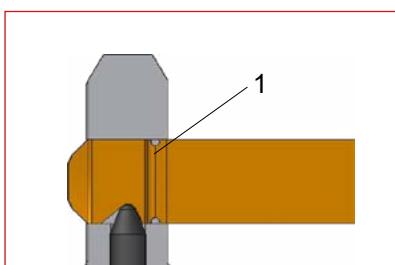


By turning back the excenter, the control bolt moves forward into the control recess of the blade.


1) Predetermined breaking point

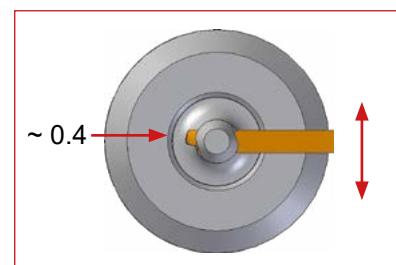


Remove assembly aid of the blade by pushing back the blade by approx. 0.4mm until the predetermined breaking point is in line with the edge of the blade window. Then break off assembly aid by using thumb and index.

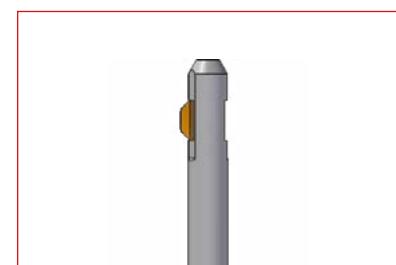


The blade moves back to the starting point as soon as it is released.

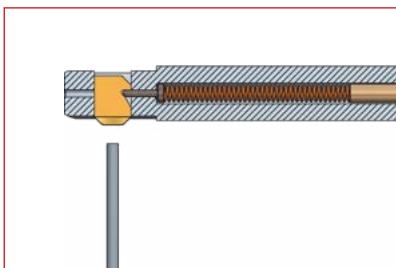


Tool SNAP12 with assembled blade

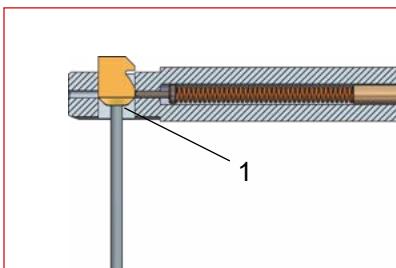

The SNAP blade can be pushed through the tool with an edgeless object.
Put the aid on at the blade head (1).

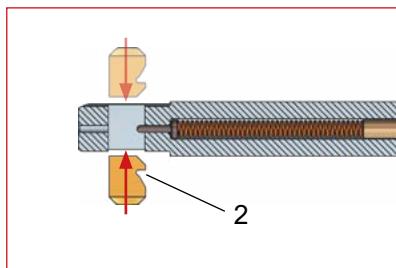

The deburring blade is pushed with its back first into the blade window of the tool until it engages. Please make sure that it is aligned with the recess (2) in the direction of the tool shank. The blade can be inserted into the tool from both sides.

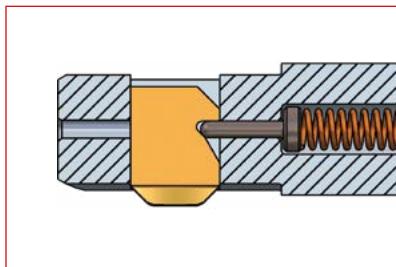

The control bolt has "snapped" into the blade recess. The tool is now ready for operation.

Spare Parts

The following tables comprise all blade housings, tool bodies and control bolts. For all other parts, please refer to the tables under "Product Selection" on pages 101 to 119.

Blade housing

Part No.				
Tool Ref.	Tool-Ø D1	Working length NL 10.0 mm	Working length NL 20.0 mm	Working length NL 30.0 mm
SNAP2/2.0/...	1.95	GH-Q-N-0001	GH-Q-N-0061	-
SNAP2/2.1/...	2.05	GH-Q-N-0002	GH-Q-N-0062	-
SNAP2/2.2/...	2.15	GH-Q-N-0003	GH-Q-N-0063	-
SNAP2/2.3/...	2.25	GH-Q-N-0004	GH-Q-N-0064	-
SNAP2/2.4/...	2.35	GH-Q-N-0005	GH-Q-N-0065	-
SNAP2/2.5/...	2.45	GH-Q-N-0006	GH-Q-N-0066	-
SNAP2/2.6/...	2.55	GH-Q-N-0007	GH-Q-N-0067	-
SNAP2/2.7/...	2.65	GH-Q-N-0008	GH-Q-N-0068	-
SNAP2/2.8/...	2.75	GH-Q-N-0009	GH-Q-N-0069	-
SNAP2/2.9/...	2.85	GH-Q-N-0010	GH-Q-N-0070	-
SNAP3/3.0/...	2.9	GH-Q-N-0021	GH-Q-N-0081	GH-Q-N-0141
SNAP3/3.1/...	3.0	GH-Q-N-0022	GH-Q-N-0082	GH-Q-N-0142
SNAP3/3.2/...	3.1	GH-Q-N-0023	GH-Q-N-0083	GH-Q-N-0143
SNAP3/3.3/...	3.2	GH-Q-N-0024	GH-Q-N-0084	GH-Q-N-0144
SNAP3/3.4/...	3.3	GH-Q-N-0025	GH-Q-N-0085	GH-Q-N-0145
SNAP3/3.5/...	3.4	GH-Q-N-0026	GH-Q-N-0086	GH-Q-N-0146
SNAP3/3.6/...	3.5	GH-Q-N-0027	GH-Q-N-0087	GH-Q-N-0147
SNAP3/3.7/...	3.6	GH-Q-N-0028	GH-Q-N-0088	GH-Q-N-0148
SNAP3/3.8/...	3.7	GH-Q-N-0029	GH-Q-N-0089	GH-Q-N-0149
SNAP3/3.9/...	3.8	GH-Q-N-0030	GH-Q-N-0090	GH-Q-N-0150
SNAP4/4.0/...	3.9	GH-Q-N-0041	GH-Q-N-0101	GH-Q-N-0161
SNAP4/4.1/...	4.0	GH-Q-N-0042	GH-Q-N-0102	GH-Q-N-0162
SNAP4/4.2/...	4.1	GH-Q-N-0043	GH-Q-N-0103	GH-Q-N-0163
SNAP4/4.3/...	4.2	GH-Q-N-0044	GH-Q-N-0104	GH-Q-N-0164
SNAP4/4.4/...	4.3	GH-Q-N-0045	GH-Q-N-0105	GH-Q-N-0165
SNAP4/4.5/...	4.4	GH-Q-N-0046	GH-Q-N-0106	GH-Q-N-0166
SNAP4/4.6/...	4.5	GH-Q-N-0047	GH-Q-N-0107	GH-Q-N-0167
SNAP4/4.7/...	4.6	GH-Q-N-0048	GH-Q-N-0108	GH-Q-N-0168
SNAP4/4.8/...	4.7	GH-Q-N-0049	GH-Q-N-0109	GH-Q-N-0169
SNAP4/4.9/...	4.8	GH-Q-N-0050	GH-Q-N-0110	GH-Q-N-0170
SNAP4/5.0/...	4.9	GH-Q-N-0051	GH-Q-N-0111	GH-Q-N-0171

Order Example:

SNAP3/3.0/20 = Blade housing GH-Q-N-0081 = NL 20.0 mm

Tool Body		
Tool Reference	Tool-Ø D1	Part No.
SNAP5		
SNAP5/5.0	4.9	GH-Q-G-1271
SNAP5/5.5	5.4	GH-Q-G-1272
SNAP5/6.0	5.9	GH-Q-G-1273
SNAP5/6.5	6.4	GH-Q-G-1274
SNAP5/7.0	6.9	GH-Q-G-1275
SNAP5/7.5	7.4	GH-Q-G-1276
SNAP5/8.0	7.8	GH-Q-G-1277
SNAP5/8.5	8.3	GH-Q-G-1389
SNAP5/9.0	8.8	GH-Q-G-1384
SNAP5/9.5	9.3	GH-Q-G-1485
SNAP5/10.0	9.8	GH-Q-G-1486
SNAP8		
SNAP8/8.0	7.8	GH-Q-G-0220
SNAP8/8.5	8.3	GH-Q-G-0221
SNAP8/9.0	8.8	GH-Q-G-0222
SNAP8/9.5	9.3	GH-Q-G-0223
SNAP8/10.0	9.8	GH-Q-G-0224
SNAP8/10.5	10.3	GH-Q-G-0225
SNAP8/11.0	10.8	GH-Q-G-0226
SNAP8/11.5	11.3	GH-Q-G-0227
SNAP8/12.0	11.8	GH-Q-G-0228
SNAP12		
SNAP12/12.0	11.8	GH-Q-G-0240
SNAP12/12.5	12.3	GH-Q-G-0241
SNAP12/13.0	12.8	GH-Q-G-0242
SNAP12/13.5	13.3	GH-Q-G-0243
SNAP12/14.0	13.8	GH-Q-G-0244
SNAP12/14.5	14.3	GH-Q-G-0245
SNAP12/15.0	14.8	GH-Q-G-0246
SNAP12/15.5	15.3	GH-Q-G-0247
SNAP12/16.0	15.8	GH-Q-G-0248
SNAP12/16.5	16.3	GH-Q-G-0249
SNAP12/17.0	16.8	GH-Q-G-0250
SNAP12/17.5	17.3	GH-Q-G-0251
SNAP12/18.0	17.8	GH-Q-G-0252
SNAP12/18.5	18.3	GH-Q-G-0253
SNAP12/19.0	18.8	GH-Q-G-0254
SNAP12/19.5	19.3	GH-Q-G-0255
SNAP12/20.0	19.8	GH-Q-G-0256
SNAP20		
SNAP20/20.0	19.8	GH-Q-G-0270
SNAP20/21.0	20.8	GH-Q-G-0271
SNAP20/22.0	21.8	GH-Q-G-0272
SNAP20/23.0	22.8	GH-Q-G-0273
SNAP20/24.0	23.8	GH-Q-G-0274
SNAP20/25.0	24.8	GH-Q-G-0275
SNAP20/26.0	25.8	GH-Q-G-0276

Tool Body (continued)

Tool Reference	Tool-Ø D1	Part No.
SNAP20/27.0	26.8	GH-Q-G-0277
SNAP20/28.0	27.8	GH-Q-G-0278
SNAP20/29.0	28.8	GH-Q-G-0279
SNAP20/30.0	29.8	GH-Q-G-0280
SNAP20/31.0	30.8	GH-Q-G-0281
SNAP20/32.0	31.8	GH-Q-G-0282
SNAP20/33.0	32.8	GH-Q-G-0283
SNAP20/34.0	33.8	GH-Q-G-0284
SNAP20/35.0	34.8	GH-Q-G-0285

Thread Tool

SNAP2/M2.5/10, SNAP2/M2.5/20	2.0	GH-Q-N-0015, GH-Q-N-0075
SNAP2/M3/10, SNAP2/M3/20	2.45	GH-Q-N-0016, GH-Q-N-0076
SNAP3/M4/10, SNAP3/M4/20, SNAP3/M4/30	3.2	GH-Q-N-0035, GH-Q-N-0095, GH-Q-N-0155
SNAP4/M5/10, SNAP4/M5/20, SNAP4/M5/30	4.1	GH-Q-N-0055, GH-Q-N-0115, GH-Q-N-0175
SNAP5/M6	4.9	GH-Q-G-5003
SNAP5/M8	6.7	GH-Q-G-5018
SNAP5/M10	8.3	GH-Q-G-5010
SNAP5/M12	10.0	GH-Q-G-5019
SNAP5/M14	11.8	GH-Q-G-5017

Control Bolt

Tool Reference	Part No.			
	other Working length	Working length 10.0 mm	Working length 20.0 mm	Working length 30.0 mm
SNAP2	-	GH-Q-E-0236	GH-Q-E-0237	
SNAP3	-	GH-Q-E-0236	GH-Q-E-0237	GH-Q-E-0238
SNAP4	-	GH-Q-E-0236	GH-Q-E-0237	GH-Q-E-0238
SNAP5	GH-Q-E-0008	-	-	-
SNAP8	GH-Q-E-0002	-	-	-
SNAP12	GH-Q-E-0002	-	-	-
SNAP 20	GH-Q-E-0003	-	-	-

SNAP Thread Tool

SNAP2/M2.5	-	GH-Q-E-0254	GH-Q-E-0256	-
SNAP2/M3	-	GH-Q-E-0236	GH-Q-E-0237	-
SNAP3/M4	-	GH-Q-E-0236	GH-Q-E-0237	GH-Q-E-0238
SNAP4/M5	-	GH-Q-E-0236	GH-Q-E-0237	GH-Q-E-0238
SNAP5/M6	GH-Q-E-0015	-	-	-
SNAP5/M8	GH-Q-E-0015	-	-	-
SNAP5/M10	GH-Q-E-0015	-	-	-
SNAP5/M12	GH-Q-E-0015	-	-	-
SNAP5/M14	GH-Q-E-0015	-	-	-

Cassette Tool


SNAP5/12.6	GH-Q-E-0008	-	-	-
SNAP20/25	GH-Q-E-0003	-	-	-
SNAP20/35	GH-Q-E-0003	-	-	-

Blade Dimensions


Dimension Table

SNAP2, Geometry GS 90°, forward and backward cutting


Chamfer-Ø	A	C	X	Y
2.4	1.92	0.525	1.0	2.0
2.6	2.03	0.625	1.0	2.0
2.8	2.12	0.625	1.0	2.0
3.0	2.32	0.625	1.0	2.0
3.2	2.52	0.625	1.0	2.0
3.4	2.72	0.625	1.0	2.0

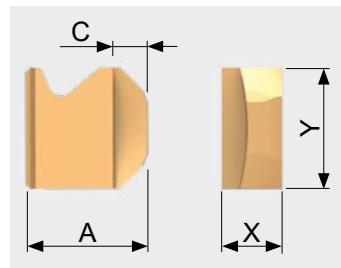**SNAP3, Geometry GS 90°, forward and backward cutting**


Chamfer-Ø	A	C	X	Y
3.3	2.84	0.55	1.0	3.0
3.6	2.84	0.7	1.0	3.0
3.9	2.84	0.85	1.0	3.0
4.2	3.04	0.9	1.0	3.0
4.5	3.34	0.9	1.0	3.0
4.8	3.64	0.9	1.0	3.0

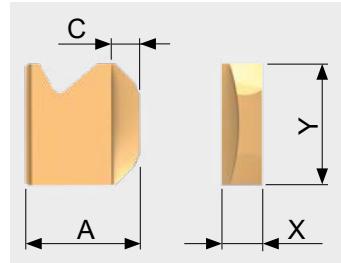**SNAP4, Geometry GS, forward and backward cutting**


Chamfer-Ø	A	C	X	Y
4.4	3.84	0.65	1.0	4.0
4.8	3.84	0.85	1.0	4.0
5.2	3.84	1.05	1.0	4.0
5.6	3.94	1.2	1.0	4.0
6.0	4.35	1.2	1.0	4.0
6.4	4.75	1.2	1.0	4.0

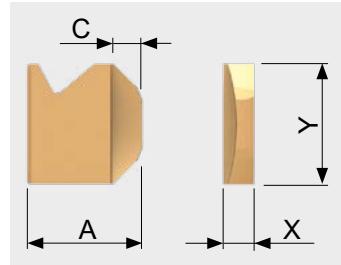**SNAP5, Geometry GS, forward and backward cutting**

Chamfer-Ø	A	C	X	Y
5.5	4.4	1.0	3.0	5.5
6.0	4.65	1.2	3.0	5.5
6.5	4.8	1.4	3.0	5.5
7.0	4.85	1.6	3.0	5.5
7.5	5.2	1.7	3.0	5.5
8.0	5.7	1.8	3.0	5.5
8.5	5.8	1.8	3.0	5.5
9.0	6.3	1.8	3.0	5.5
9.5	6.8	1.8	3.0	5.5
10.0	7.3	1.8	3.0	5.5

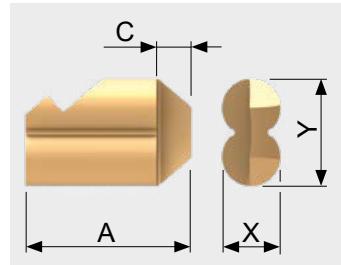**SNAP8, Geometry GS, forward and backward cutting**


Chamfer-Ø	A	C	X	Y
8.5	7.4	1.2	2.0	8.0
9.0	7.5	1.4	2.0	8.0
9.5	7.9	1.6	2.0	8.0
10.0	8.0	1.6	2.0	8.0
10.5	8.4	1.6	2.0	8.0
11.0	8.5	1.8	2.0	8.0
11.5	8.9	1.8	2.0	8.0
12.0	9.3	1.8	2.0	8.0
12.5	9.7	1.8	2.0	8.0
13.0	10.1	1.8	2.0	8.0
13.5	10.4	1.8	2.0	8.0

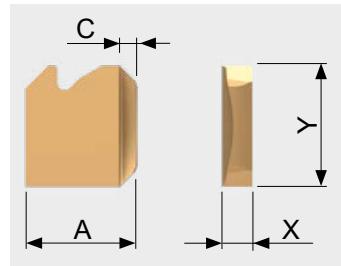

Dimension Table (continued)


SNAP12, Geometry GS 90°, forward and backward cutting

Chamfer-Ø	A	C	X	Y
12.5	10.45	1.8	3.0	8.0
13.0	10.65	1.8	3.0	8.0
13.5	10.95	1.8	3.0	8.0
14.0	11.45	1.8	3.0	8.0
14.5	11.95	1.8	3.0	8.0
15.0	12.45	1.8	3.0	8.0
15.5	12.75	1.8	3.0	8.0
16.0	12.95	1.8	3.0	8.0
16.5	13.15	1.8	3.0	8.0
17.0	13.55	1.8	3.0	8.0
17.5	13.95	1.8	3.0	8.0
18.0	14.15	1.8	3.0	8.0
18.5	14.45	1.8	3.0	8.0
19.0	14.75	1.8	3.0	8.0
19.5	14.95	1.8	3.0	8.0
20.0	15.35	1.8	3.0	8.0
20.5	15.55	1.8	3.0	8.0
21.0	15.95	1.8	3.0	8.0
21.5	16.35	1.8	3.0	8.0
22.0	16.55	1.8	3.0	8.0

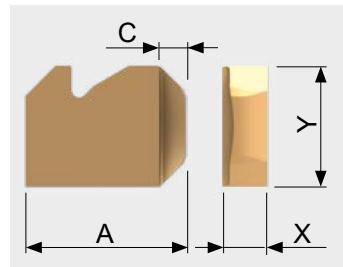


SNAP20, Geometry GS 90°, forward and backward cutting

Chamfer-Ø	A	C	X	Y
21.0	16.95	2.5	5.0	10.0
22.0	17.45	2.5	5.0	10.0
23.0	17.95	2.5	5.0	10.0
24.0	18.45	2.5	5.0	10.0
25.0	19.95	2.5	5.0	10.0
26.0	20.45	2.5	5.0	10.0
27.0	20.95	2.5	5.0	10.0
28.0	21.45	2.5	5.0	10.0
29.0	21.95	2.5	5.0	10.0
30.0	23.45	2.5	5.0	10.0
31.0	23.95	2.5	5.0	10.0
32.0	24.45	2.5	5.0	10.0
33.0	24.95	2.5	5.0	10.0
34.0	25.45	2.5	5.0	10.0
35.0	26.95	2.5	5.0	10.0
36.0	27.45	2.5	5.0	10.0
37.0	27.95	2.5	5.0	10.0
38.0	28.45	2.5	5.0	10.0

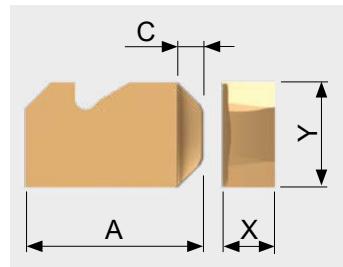


SNAP Thread Blades, Geometry GS 90°, forward and backward cutting

Chamfer-Ø	A	C	X	Y
Ø2.8 (M2.5)	1.97	0.65	1.0	2.0
Ø3.4 (M3)	2.42	0.775	1.0	2.0
Ø4.5 (M4)	3.14	1.05	1.0	3.0
Ø5.6 (M5)	3.94	1.2	1.0	4.0

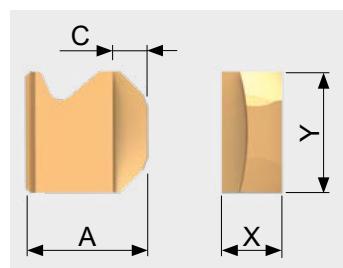


SNAP Thread Blades, Geometry DRA 90°, forward and backward cutting

Chamfer-Ø	A	C	X	Y
Ø6.5 (M6)	4.8	1.5	3.0	5.5
Ø8.5 (M8)	6.6	1.7	3.0	5.5
Ø10.5 (M10)	7.2	1.9	3.0	5.5
Ø12.5 (M12)	8.7	2.1	3.0	5.5
Ø14.5 (M14)	11.2	2.1	3.0	5.5

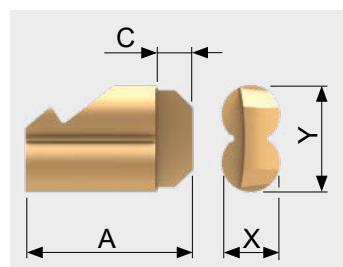


Dimension Table (continued)

SNAP5 Cassette Blades, Geometry GS, forward and backward cutting				
Chamfer-Ø	A	C	X	Y
0.5	6.29	1.3	3.0	5.5
1.0	6.79	1.8	3.0	5.5
1.5	7.29	2.3	3.0	5.5

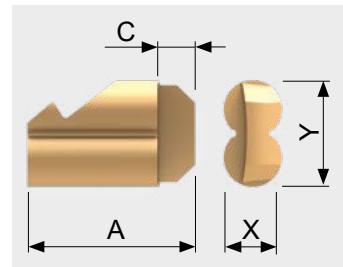

SNAP20 Cassette Blades, Geometry GS, forward and backward cutting				
Chamfer-Ø	A	C	X	Y
0.5	16.0	2.5	5.0	10.0
1.0	16.5	2.5	5.0	10.0
1.5	16.5	2.8	5.0	10.0

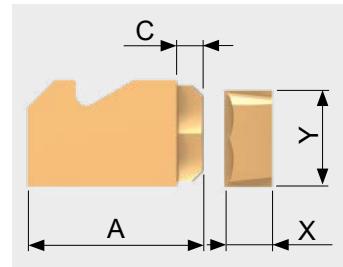

FAQ SNAP

Problem	Reasons	Solution
Burr is not ground away	<ul style="list-style-type: none"> See points below: chamfer too small or no chamfer at all 	<ul style="list-style-type: none"> ⇒ Choose blade for larger chamfer
Chamfer tool small	<ul style="list-style-type: none"> Selected blade too small Feed rate too high 	<ul style="list-style-type: none"> ⇒ Choose blade for larger chamfer ⇒ Reduce feed rate
No chamfer	<ul style="list-style-type: none"> Blade force too small Blade is blunt Too large burr formation Blade sticks and can no longer move out of the blade housing. 	<ul style="list-style-type: none"> ⇒ Turn set screw clockwise to increase blade force, only possible when using SNAP GS blades ⇒ Put in new blade ⇒ Replace drilling tool ⇒ Cast materials should always be machined with coolant. This removes the cast dust from the blade window.
Different chamfer size at the front and the back side	<ul style="list-style-type: none"> Feed rate varies from the front side to the back side Varying burr formation forwards and backwards 	<ul style="list-style-type: none"> ⇒ Select constant feed rate forwards and backwards, only possible when using SNAP GS blades ⇒ Reduce feed rate on the side with the too small chamfer, only possible when using SNAP GS blades ⇒ Increase feed rate on the side with too large chamfer, only possible when using SNAP GS blades
Chamfer with chatter marks	<ul style="list-style-type: none"> Workpiece or tool not secured properly Tool in unstable condition Speed too high 	<ul style="list-style-type: none"> ⇒ Ensure workpiece or tool is properly secured ⇒ Increase feed rate of tool and check blade force ⇒ Reduce speed
No constant chamfer size	<ul style="list-style-type: none"> Varying feed rates Blade force insufficient not allowing blade to extend fully to starting position every time Tool in unstable condition 	<ul style="list-style-type: none"> ⇒ Choose constant feed rate ⇒ Turn set screw clockwise to increase blade force ⇒ Increase blade force and feed rate
Poor blade life	<ul style="list-style-type: none"> Workpiece or tool not secured properly (Vibrations) Insufficient stability of machine (wear of spindle, etc.) Wrong blade coating 	<ul style="list-style-type: none"> ⇒ Ensure workpiece or tool is properly secured ⇒ Recondition/rectify machine faults or guide in hole with special tool ⇒ Choose other coating